

(19)



(11)

EP 3 269 110 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:
16.12.2020 Bulletin 2020/51

(51) Int Cl.:
H04L 29/06 ^(2006.01) **H04L 12/859** ^(2013.01)
H04L 12/851 ^(2013.01)

(21) Application number: **16709908.4**

(86) International application number:
PCT/EP2016/025024

(22) Date of filing: **14.03.2016**

(87) International publication number:
WO 2016/146269 (22.09.2016 Gazette 2016/38)

(54) **METHOD OF COMMUNICATING DATA PACKETS WITHIN DATA COMMUNICATION SYSTEMS**

VERFAHREN ZUM ÜBERMITTELN VON DATENPAKETEN IN DATENKOMMUNIKATIONSSYSTEMEN

PROCÉDÉ DE COMMUNICATION DE PAQUETS DE DONNÉES DANS DES SYSTÈMES DE COMMUNICATION DE DONNÉES

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

• **KALEVO, Ossi**
Akaa 37800 (FI)

(30) Priority: **13.03.2015 GB 201504336**

(74) Representative: **Norris, Timothy Sweyn et al**
Basck
50 - 60 Station Road
Cambridge CB1 2JH (GB)

(43) Date of publication of application:
17.01.2018 Bulletin 2018/03

(56) References cited:
US-A1- 2003 035 413 US-A1- 2007 104 224
US-A1- 2008 192 726 US-A1- 2010 040 084
US-A1- 2012 063 449 US-B1- 7 000 120

(73) Proprietor: **Gurulogic Microsystems OY**
20100 Turku (FI)

(72) Inventors:
• **KÄRKKÄINEN, Tuomas**
Turku 20320 (FI)

EP 3 269 110 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description**TECHNICAL FIELD**

5 [0001] The present disclosure relates to methods of communicating data packets within data communication systems. Moreover, the present disclosure also relates to data communication systems employing the aforesaid methods of communicating data packets. Furthermore, the present disclosure also relates to devices that are operable to implement the aforesaid methods. Additionally, the present disclosure relates to computer program products comprising a non-transitory computer-readable storage medium having computer-readable instructions stored thereon, the computer-readable instructions being executable by a computerized device comprising processing hardware to execute the aforementioned methods.

BACKGROUND

15 [0002] FIG. 1 is a schematic illustration of a conventional data communication method; FIG. 1 represents prior art. Input data (D1) 10 is processed and encoded to generate corresponding encoded output data (E2) 20. For this purpose, one or more encoding transformations (F) 30 are applied to the input data (D1) 10.

[0003] The encoded output data (E2) 20 is often communicated via a data carrier and/or a data communication network to one or more decoders. These decoders are operable to apply one or more decoding transformations (F⁻¹) 80 to the encoded output data (E2) 20 to generate corresponding decoded data (D3) 90.

20 [0004] The input data (D1) 10 often includes various types of data, for example, such as audio data, video data, image data, text data, sensor data, and so forth. In operation, a situation often arises that certain of the various types of data have a higher priority over others. As an example, audio data is given a higher priority for delivery, in an event that the data communication network is unable to deliver video data due to insufficient data bandwidth. Moreover, there arise different priorities for temporal delivery of the different types of data. As an example, audio data needs to be delivered promptly, whereas text data may be less temporally critical.

25 [0005] Thus, it is commonly known that different types of data can have mutually different requirements as regards data transfer. In this regard, some conventional data communication systems have been designed in a manner that they take into account requirements of different types of data communicated therethrough, either in running processes of the data communication systems themselves, or included in their communication protocols, for example, in respect of their real-time operation.

[0006] A known prior art technique is the Real Time Messaging Protocol (RTMP) designed by Macromedia Inc., but currently owned by Adobe Systems Incorporated (see reference [1]). The RTMP comprises both a data transfer format and a communication system, wherein data transfer within the communication system is integrated with operation logics that process messages in a prioritized manner so that the messages are not treated equally. Such prioritizing makes it possible, for example, to process and transmit audio data before video data.

30 [0007] However, the RTMP protocol splits the messages into smaller fragments called "chunks", whose composition is decided by at least one server and at least one client by a mutual agreement. Such decisions are made depending both on a communication protocol used and on various different variables that the RTMP protocol describes (see reference [2]).

[0008] The RTMP protocol is usually used together with either the contemporary User Datagram Protocol (UDP) or the contemporary Transmission Control Protocol (TCP), wherein messages are usually split into data chunks whose size is in a range of 128 bytes to 256 bytes.

35 [0009] Furthermore, as data communication networks routinely transfer large quantities of different types of data in various system processes and external processes, it is evident that data transfer capacities of these data communication networks are usually not sufficient unless a given application, device or the data communication networks themselves attempt to control available transfer capacities of the data communication networks using Quality of Service (QoS) schemes (see reference [3]).

[0010] A problem encountered with known contemporary data communication networks is that several individual processes executing in an overall system associated with the known contemporary data communication networks often implement their own QoS arrangements mutually independently, programmatically, without taking into consideration needs of other processes being executed in the data communication networks.

40 [0011] Another problem encountered with the known contemporary data communication networks is that an operating system level QoS approach that has been used is potentially not optimized for all types of data being transferred through the data communication networks. As a result, further performance deterioration in the data communication networks can arise, since operating systems of different devices mutually differ. These operating systems often do not have sufficient functionality to take into consideration communication network related needs of other programs, devices and applications, but instead aim to control all data that is transmitted or received through the data communication networks.

[0012] Moreover, an operating system or a device may be executing various mutually different anti-virus software and firewall arrangements, whose principal mission is to allow only clean and known data to be transferred. Scanning of data performed by these anti-virus software and firewall arrangements potentially causes delays in data transfer, both during transmission and reception of data.

5 [0013] Moreover, as deployment of the Internet become increasingly geographically common throughout the World, the data communication networks increasingly suffer from a considerable lack of data transfer capacity, which makes them very slow in response times. In a transition phase of software development, it is not understood what really happens in the data communication networks when, for example, data is transmitted one-character-at-a-time or only a few bytes at a time. Such one-character-at-a-time data transfer causes a large amount of so-called almost empty data packets to be circulating in the data communication networks, which is highly inefficient.

10 [0014] To address the aforementioned data transfer problem for one-character-at-a-time, the Nagle's algorithm has been developed (see reference [4]). However, the Nagle's algorithm is not designed to prioritize between different types of data, neither is it a completely functioning model for implementing real-time communication. This is because the algorithm itself collects and stores data until a given data communication network's capacity for a data packet has been reached maximally.

15 [0015] Furthermore, it will be appreciated that data to be transferred is conventionally fragmented both in wired and in wireless data communication networks. A data packet is optionally fragmented regardless of an infrastructure or system settings of a given transmitter or a given receiver, because network nodes optionally have several transmitters that have different-sized capacities. Low-end routers and/or networks optionally split a large-sized data packet into smaller fragments that comply with capabilities of those routers and/or networks, because otherwise they would not be able to transfer the data packet forward in a controlled manner.

20 [0016] For example, wireless General Packet Radio Service (GPRS) networks of mobile phone operators using the Global System for Mobile communications (GSM) standard often conventionally split data packets into smaller fragments (see reference [5]).

25 [0017] When a transmitted data packet is fragmented into smaller packets, as occurs in known data communication systems, new problems are caused as data communication networks join at routers while transmitting the data packet to a given receiver.

[0018] Similar types of problems occur especially in wireless data communication networks, such as Wireless Local Area Networks (WLAN) (see reference [6]). Some of the most common problems encountered in the conventional WLAN are packet collisions and packet loss. Thus, more problems are caused when fragmented packets are processed.

30 [0019] In a published US patent application US 2007/0104224 A1 ("*Differentiated Quality of Service Transport Protocols*"; inventors: Keith Faulk Conner, Anil M. Rao), there is described a method for applying a differentiated Quality of Service (QoS) to a payload using a profile indicator that can identify or be used to identify portions of the payload having different QoS requirements. The profile indicator may be one or more length indicators for indicating a length of each portion of the payload, or it may be an index to a table that indicates the length of each portion of the payload. The table can be used to map the profile indicator to a number of portions in a given packet, the length of each portion and a QoS requirement for each portion.

35 [0020] In another published US patent application US 2008/0192726 A1 ("*Wireless HD MAC Frame Format*", inventors: Kumar Mahesh, Karthik Krishnaswami, Karen Wang, Jeffrey M. Gilbert, Chuen-Shen Shung), there is described a media access controller (MAC) that generates a composite packet having an optimized format for carrying audio, video, and data traffic. A header portion of the composite packet is encoded separately from a data portion of the composite packet. A physical device interface (PHY) is coupled to the MAC. The PHY encodes and decodes between a digital signal and a modulated analog signal. The PHY comprises a high rate physical layer circuit (HRP) and a low rate physical layer circuit (LRP). A radio frequency (RF) transmitter is coupled to the PHY to transmit data.

40 [0021] In yet another published US patent application US 2010/0040084 A1 ("*System and Method for Efficient Transmission of Multimedia and Data*"; inventors: Seyed-Alireza Seyedi-Esfahani, Dagnachew Birru; Applicant: Koninklijke Philips Electronics, N.V.), there are described a system and method for transmission of different types of source data in a same given packet, thereby enabling transmission of multimedia and data content with unequal error protection. There is defined a packet structure in which a packet consists of a number of segments or payloads. The packet includes a field indicative of a number of payloads included in the packet, and at least one data field for each payload in the packet, wherein the at least one data field defines at least one characteristic of the payload.

45 [0022] In still another published US patent application US 2012/0063449 A1 ("*Configurable Network Socket Aggregation to Enable Segmentation Offload*", inventors: Maria J. Frederic, Nikhil Hegde, Sivakumar Krishnasamy, Vishal R. Mansur; Applicant: International Business Machines Corporation), there is described a network device that is operable to implement configurable socket aggregation to enable segmentation offload in the network device. At the network device, a network socket is created for an application of the network device to initiate a network connection for the application. Socket aggregation parameters are determined for the network socket associated with the application. The network socket is defined based, at least in part, on the socket aggregation parameters. A plurality of packets received

from the application associated with the network socket are aggregated. Based upon the aggregation, it is determined whether or not at least one aggregation limit associated with the socket aggregation parameters is reached. An aggregate packet is provided to a network adapter of the network device to perform segmentation offload, if it is determined that at least one aggregation limit associated with the socket aggregation parameters is reached.

5 [0023] In yet another published US patent application US 2003/0035413 A1 ("*Intelligent IP Relay*", inventors: Sudhindra Pundaleeka Herle, Bryan Jeffery Moles, Applicant: Samsung Electronics Co., Ltd.), there is described a method of improving bandwidth utilization. A proxy, at an interface between a wireless communications system and a packet network, intercepts all traffic between the wireless communications systems and the packet network, and re-formats the intercepted traffic according to an optimal maximum transmission unit size between the interception point and the final destination. This results in packets from the wireless communications system being aggregated into a larger maximum transmission unit size, while packets from the packet network are fragmented into a smaller maximum transmission unit size.

10 [0024] In still another granted US patent US 7000120 B1 ("*Scheme for determining transport level information in the presence of IP security encryption*", Inventor: Rajeev Koodli, Senthil Sengodan; Applicant: Nokia Corporation), there are described a method and apparatus for permitting access to selected information in selected fields of a packet, which has been subjected to security processing, by intermediate nodes in a packet switched network when the packet is being transmitted on the packet switched network.

SUMMARY

20 [0025] The present disclosure seeks to provide an improved data communication system.

[0026] Moreover, the present disclosure seeks to provide an improved method of communicating data.

[0027] A further aim of the present disclosure is to at least partially overcome at least some of the problems of the prior art, as discussed above.

25 [0028] In a first aspect, embodiments of the present disclosure provide a data communication system comprising at least one transmitter that is operable to communicate data packets via a data communication network and/or a data carrier to at least one receiver, wherein the at least one transmitter is operable to construct the data packets and include within at least one of the data packets a plurality of mutually different types of data, characterized in that the plurality of mutually different types of data have different priorities, wherein while constructing the at least one of the data packets, the type of data having a highest priority is added first and is followed by the type of data having a lower priority going towards a lowest priority.

30 [0029] The invention is of advantage in that the data communication system is capable of communicating various types of data in a more efficient manner.

35 [0030] By "*mutually different types of data*" is meant data of mutually different content, structure, format, for example encoding format, temporal characteristics (for example a video sequence or an audio sample), multi-dimensional data (for example relating to 3-dimensional biological scanning images) and so forth.

[0031] By "*different priorities*" is meant an order in which given data to be communicated is selected to be processed and thereafter communicated in a data communication system.

40 [0032] Optionally, the data communication system is operable to communicate to the at least one receiver information that is indicative of the different priorities of the plurality of mutually different types of data.

[0033] The data communication network includes at least one of: an optical fibre-based data communication network, a wired data communication network, a wireless data communication network, a physical data carrier, a single-quantum data communication network within which bits are uniquely and exclusively defined by their corresponding quantum when communicated. Quantum data communication networks are often employed where an ultra-degree of data security and data confidentiality are required. The data carrier includes at least one of: solid state memory, optical memory, magnetic memory, ferroelectric memory, quantum memory.

45 [0034] Optionally, the data communication system is operable to generate the at least one of the data packets by employing a multistage process that includes:

- 50 (i) providing data to at least one data stream;
 (ii) compressing the at least one data stream; and
 (iii) assembling the at least one data stream to generate the data packets for communicating from the at least one transmitter to the at least one receiver.

55 [0035] Optionally, the data communication system and/or the data carrier is operable to communicate the information that is indicative of the different priorities of the plurality of mutually different types of data within the at least one of the data packets.

[0036] In a second aspect, embodiments of the present disclosure provide a transmitter for use in a data communication

system, the transmitter being operable to communicate data packets via a data communication network and/or a data carrier to at least one receiver, wherein the transmitter is operable to construct the data packets and include within at least one of the data packets a plurality of mutually different types of data, characterized in that the plurality of mutually different types of data have different priorities, wherein when the at least one of the data packets is constructed, the type of data having a highest priority is added first and is followed by the type of data having a lower priority going towards a lowest priority.

[0037] By "*mutually different types of data*" is meant data of mutually different content, structure, format, for example encoding format, temporal characteristics (for example a video sequence or an audio sample), multi-dimensional data (for example relating to 3-dimensional biological scanning images) and so forth.

[0038] By "*different priorities*" is meant an order in which given data to be communicated is selected to be processed and thereafter communicated in a data communication system.

[0039] Optionally, the transmitter is operable to communicate to the at least one receiver information that is indicative of the different priorities of the plurality of mutually different types of data.

[0040] Optionally, the transmitter is operable to include the information that is indicative of the different priorities of the plurality of mutually different types of data within the at least one of the data packets.

[0041] In a third aspect, embodiments of the present disclosure provide a receiver for use in a data communication system, wherein the receiver is operable to process at least one data packet received via a data communication network and/or a data carrier from at least one transmitter, wherein the at least one data packet includes a plurality of mutually different types of data, and to process the mutually different types of data to mutually separate the mutually different types of data,

characterized in that the plurality of mutually different types of data have different priorities, wherein the receiver is operable to unpack the at least one data packet to extract the plurality of mutually different types of data from the at least one data packet, and to construct data streams of the mutually different types of data as per a descending order of priorities in which the plurality of mutually different types of data occur in the at least one data packet.

[0042] By "*mutually different types of data*" is meant data of mutually different content, structure, format, for example encoding format, temporal characteristics (for example a video sequence or an audio sample), multi-dimensional data (for example relating to 3-dimensional biological scanning images) and so forth.

[0043] By "*different priorities*" is meant an order in which given data to be processed is selected to be correspondingly processed in a data communication system.

[0044] Optionally, the mutually different types of data are separated out in the receiver to corresponding channels, for example, such as meta data, audio data, video data, parameter data.

[0045] Optionally, the receiver is operable to receive information that is indicative of the different priorities of the plurality of mutually different types of data, and to process the mutually different types of data according to the information that is indicative of the different priorities of the plurality of mutually different types of data.

[0046] Optionally, the receiver is operable to process the information that is indicative of the different priorities of the plurality of mutually different types of data, wherein the information is included within the at least one data packet.

[0047] In a fourth aspect, embodiments of the present disclosure provide a method of communicating data, the method comprising communicating data packets via a data communication network and/or a data carrier from at least one transmitter to at least one receiver, wherein the method further comprises constructing the data packets and including within at least one of the data packets a plurality of mutually different types of data, characterized in that the plurality of mutually different types of data have different priorities, wherein when the at least one of the data packets is constructed, the type of data having a highest priority is added first and is followed by the type of data having a lower priority going towards a lowest priority.

[0048] By "*mutually different types of data*" is meant data of mutually different content, structure, format, for example encoding format, temporal characteristics (for example a video sequence or an audio sample), multi-dimensional data (for example relating to 3-dimensional biological scanning images) and so forth.

[0049] By "*different priorities*" is meant an order in which given data to be communicated is selected to be processed and thereafter communicated in a data communication system. Optionally, the method further includes communicating to the at least one receiver information that is indicative of the different priorities of the plurality of mutually different types of data.

[0050] Optionally, the method includes incorporating the information that is indicative of the different priorities of the plurality of mutually different types of data within the at least one data packet.

[0051] In a fifth aspect, embodiments of the present disclosure provide a method of operating a transmitter, the method comprising communicating data packets via a data communication network and/or a data carrier to at least one receiver, wherein the method further comprises including within at least one of the data packets a plurality of mutually different types of data,

characterized in that the plurality of mutually different types of data have different priorities, wherein when the at least one of the data packets is constructed, the type of data having a highest priority is added first and is followed by the

type of data having a lower priority going towards a lowest priority.

[0052] By "*mutually different types of data*" is meant data of mutually different content, structure, format, for example encoding format, temporal characteristics (for example a video sequence or an audio sample), multi-dimensional data (for example relating to 3-dimensional biological scanning images) and so forth.

[0053] By "*different priorities*" is meant an order in which given data to be communicated is selected to be processed and thereafter communicated in a data communication system.

[0054] Optionally, the method further includes communicating to the at least one receiver information that is indicative of the different priorities of the plurality of mutually different types of data.

[0055] Optionally, the method further includes incorporating the information that is indicative of the different priorities of the plurality of mutually different types of data within the at least one data packet.

[0056] In a sixth aspect, embodiments of the present disclosure provide a method of operating a receiver, wherein the method comprises:

processing at least one data packet received via a data communication network and/or a data carrier from at least one transmitter, wherein the at least one data packet includes a plurality of mutually different types of data; and

processing the mutually different types of data to mutually separate the plurality of mutually different types of data,

characterized in that the plurality of mutually different types of data have different priorities, wherein the method further comprises unpacking the at least one data packet to extract the plurality of mutually different types of data from the at least one data packet; and constructing data streams of the mutually different types of data as per a descending order of priorities in which the plurality of mutually different types of data occur in the at least one data packet.

[0057] By "*mutually different types of data*" is meant data of mutually different content, structure, format, for example encoding format, temporal characteristics (for example a video sequence or an audio sample), multi-dimensional data (for example relating to 3-dimensional biological scanning images) and so forth.

[0058] By "*different priorities*" is meant an order in which given data to be processed is selected to be correspondingly processed in a data communication system.

[0059] Optionally, the method further includes receiving at the receiver information that is indicative of the different priorities of the plurality of mutually different types of data; and processing the mutually different types of data according to the information that is indicative of the different priorities of the plurality of mutually different types of data.

[0060] Optionally, in the method, the information that is indicative of the different priorities of the plurality of mutually different types of data is included within the at least one data packet.

[0061] In a seventh aspect, embodiments of the present disclosure provide a computer program product comprising a non-transitory computer-readable storage medium having computer-readable instructions stored thereon, the computer-readable instructions being executable by a computerized device comprising processing hardware to execute any of the aforementioned methods.

[0062] Embodiments of the present disclosure are capable of providing an at least partial solution to the aforementioned problem, and enable processing of prioritized data into data packets, so that time-critical data is duly delivered to a given receiver before the data is outdated or before a time-to-live period defined for the data ends.

[0063] Additional aspects, advantages, features and objects of the present disclosure would be made apparent from the drawings and the detailed description of the illustrative embodiments construed in conjunction with the appended claims that follow.

[0064] It will be appreciated that features of the present disclosure are susceptible to being combined in various combinations without departing from the scope of the present disclosure as defined by the appended claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0065] The summary above, as well as the following detailed description of illustrative embodiments, is better understood when read in conjunction with the appended drawings. For the purpose of illustrating the present disclosure, exemplary constructions of the disclosure are shown in the drawings. However, the present disclosure is not limited to specific methods and apparatus disclosed herein. Moreover, those in the art will understand that the drawings are not to scale. Wherever possible, like elements have been indicated by identical numbers.

[0066] Embodiments of the present disclosure will now be described, by way of example only, with reference to the following diagrams wherein:

FIG. 1 is a schematic illustration of a conventional data communication method; FIG. 1 represents prior art;

FIG. 2 is a schematic illustration of a data communication system, in accordance with an embodiment of the present disclosure;

FIGs. 3A-B collectively are a schematic illustration of a flow chart depicting steps of a method of communicating data, in accordance with an embodiment of the present disclosure;

5 FIG. 4 is a schematic illustration of a flow chart depicting steps of a method of processing data packets, in accordance with an embodiment of the present disclosure;

FIGs. 5A-C collectively are a schematic illustration of an example of constructing data packets, in accordance with an embodiment of the present disclosure;

FIGs. 6A-C collectively are a schematic illustration of an example of unpacking data packets, in accordance with an embodiment of the present disclosure; and

10 FIGs. 7A-B collectively are a schematic illustration of an example of an internal division and a structure of a payload of data packets, in accordance with an embodiment of the present disclosure.

[0067] In the accompanying diagrams, an underlined number is employed to represent an item over which the underlined number is positioned or an item to which the underlined number is adjacent. A non-underlined number relates to an item identified by a line linking the non-underlined number to the item. When a number is non-underlined and accompanied by an associated arrow, the non-underlined number is used to identify a general item at which the arrow is pointing.

20 DETAILED DESCRIPTION OF EMBODIMENTS

[0068] The following detailed description illustrates embodiments of the present disclosure and ways in which they can be implemented. Although some modes of carrying out the present disclosure have been disclosed, those skilled in the art would recognize that other embodiments for carrying out or practising the present disclosure are also possible.

25 [0069] In a first aspect, embodiments of the present disclosure provide a data communication system comprising at least one transmitter that is operable to communicate data packets via a data communication network and/or a data carrier to at least one receiver, wherein the at least one transmitter is operable to include within at least one of the data packets a plurality of mutually different types of data, characterized in that the plurality of mutually different types of data have mutually different priorities.

30 [0070] By "*mutually different types of data*" is meant data of mutually different content, structure, format, for example encoding format, temporal characteristics (for example a video sequence or an audio sample), multi-dimensional data (for example relating to 3-dimensional biological scanning images) and so forth.

[0071] By "*mutually different priorities*" is meant an order in which given data to be communicated is selected to be processed and thereafter communicated in a data communication system.

35 [0072] Optionally, the data communication system is operable to provide information to the at least one receiver that is indicative of the mutually different priorities of the plurality of mutually different types of data.

[0073] It is to be noted herein that the term "*transmitter*" does not necessarily refer to a source device from where data originated, but can also refer to an intermediate network device (namely a "proxy") of a data communication network that processes the data received from the source device and delivers the processed data to the at least one receiver. In other words, the data communication system processes and delivers the data, either internally inside a given computing device or externally via the data communication network, namely a network device of the data communication network. Optionally, the information that is indicative of the mutually different priorities of the plurality of mutually different types of data is incorporated into the at least one of the data packets. However, it will be appreciated that the information, additionally or alternatively, is supplied separately to the at least one receiver, for example in one or more separate data packets dedicated to communicating the information, and/or pre-programmed into the at least one receiver.

45 [0074] According to an embodiment, the at least one transmitter is operable to include the information to be indicative of at least one of: life-times of the different types of data, permissible latencies of the different types of data, formats of the different types of data, time-to-live expectations of the different types of data, required response times for the different types of data.

50 [0075] Optionally, the data communication system is operable to generate the at least one of the data packets by employing a multistage process that includes:

(i) providing data to at least one data stream;

(ii) compressing the at least one data stream; and

55 (iii) assembling the at least one data stream to generate the data packets for communicating from the at least one transmitter to the at least one receiver.

[0076] According to an embodiment, the at least one transmitter is operable to construct the data packets as determined

by configuration data received from the at least one receiver and/or the data communication network. In this regard, the at least one transmitter is operable to construct the data packets in a manner that the data packets are optimal for both the at least one receiver and the data communication network. Optionally, when there are a plurality of receivers, and the receivers are mutually different, the at least one transmitter is operable to transmit data using a plurality of mutually different constructions to customize transmitted data to suit the plurality of receivers. Alternatively, the data communication network is operable to identify a common form of construction of data that is suited to all the plurality of receivers; such identification involves, for example, interrogating the plurality of receivers for the plurality of receivers to respond by indicating their respective form for constructed data to be received thereat, for example in respect of priorities. For example, certain receivers possess considerable data processing capability to handle video information in real-time, whereas other receivers have more modest data processing capability to handle only audio in real-time.

[0077] In addition to a delay that is accumulated in the data communication network when transmitting the data packets from the at least one transmitter to the at least one receiver, a further delay is generated at the at least one transmitter and the at least one receiver when the at least one transmitter and the at least one receiver process the data packets. Therefore, in addition to a speed of the data communication network, processing capacities of the at least one transmitter and the at least one receiver are taken into account when constructing the data packets. It will be appreciated that there are optionally a plurality of transmitters. Moreover, it will be appreciated that there are optionally a plurality of receivers, for example in a multi-casting situation.

[0078] Optionally, the at least one transmitter is operable to split a given type of data to be written or transmitted into optimally-sized data chunks, for example, as will be described later in conjunction with an example. Optionally, when determining a size of a given data chunk, an associated header included in the given data chunk is also taken into consideration. Optionally, the at least one transmitter is operable to construct the at least one of the data packets from data chunks of the different types of data.

[0079] According to an embodiment, the at least one transmitter is operable to assemble the data packets until their size approaches substantially a maximum segment size of the data communication network before sending the data packets to the at least one receiver.

[0080] Optionally, in this regard, the at least one transmitter and/or the data communication system is operable to recognize and calculate a maximum supported segment size of an entire communication route through the data communication network from the at least one transmitter to the at least one receiver, namely a maximum segment size that is supported by an infrastructure of the data communication network through the entire communication route. The maximum supported segment size yields information about a maximum amount of data that a single data packet is able to transfer through the entire communication route without being fragmented into smaller packets. Such an approach avoids the data communication system adding latency by having to reform data packets to communicate data through certain portions of the data communication system, thereby increasing data communication rates in operation.

[0081] Depending on the data communication network that is utilized, different concepts and mathematical formulae are used to calculate the maximum supported segment size. As an example, when the Internet Protocol (IP) of the Internet network is used, a Maximum Segment Size (MSS) can be calculated for an entire communication route of a given connection if a Maximum Transmission Unit (MTU, see reference [7]) is known for the given connection. The IP protocol of the Internet network provides a standard technique for determining an MTU between two IP hosts, namely Path MTU Discovery (see reference [8]). Accordingly, optionally, the at least one transmitter is operable to use the Path MTU Discovery to find out the MTU between the at least one transmitter and the at least one receiver.

[0082] In an example where an MTU for a given connection between the at least one transmitter and the at least one receiver is determined to be 1500 bytes, the maximum supported segment size is calculated to be 1460 bytes for the IP protocol of the Internet network.

[0083] It will be appreciated that sub-optimal data packets, namely data packets that are either too small or too large, may be sent right after a given connection is set up between the at least one transmitter and the at least one receiver, before the data communication system has calculated the maximum supported segment size for an entire communication route of the given connection. Thus, the maximum supported segment size is optionally iteratively dynamically adjusted during communication of data from the at least one transmitter to the at least one receiver.

[0084] According to an embodiment, the at least one transmitter and/or the data communication system is operable to adjust a size of the data packets to the maximum supported segment size of the entire communication route. As a result, the data packets comply with the maximum supported segment size of the entire communication route. This potentially ensures that the data packets are not fragmented into smaller parts during their transmission through the data communication network. This potentially enables a more efficient data transfer in the data communication network, as compared to conventional data communication systems where data packets are fragmented during transmission.

[0085] Thus, according to an embodiment, the data communication network communicates the data packets without splitting the data packets into fragments.

[0086] Moreover, less time is expended in delivering a same amount of data as compared to the conventional data communication systems. This potentially enables a maximal data transmission rate to be achieved for the data commu-

nication network. This is particularly beneficial in situations where a data transfer capacity of the data communication system and its associated infrastructure is already being used by other processes, and the data communication system is employed, for example, for a full-duplex real-time data transfer between one or more terminal devices.

5 [0087] It will be appreciated that, regardless of the data communication network being used, a data transfer capacity of the data communication network may potentially change suddenly. As an example, in the Internet network, a communication path may change while a data packet is being routed through the communication path. As a result, the MTU between the at least one transmitter and the at least one receiver may also change.

10 [0088] Optionally, in this regard, the at least one transmitter is operable to determine the MTU again, namely "reprobe" the MTU between the at least one transmitter and the at least one receiver. Accordingly, the maximum supported segment size is recalculated so as to be in sync with the change in the data transfer capacity of the data communication network. In other words, in embodiments of the present disclosure, the maximum supported segment size is temporally dynamically varied in response to changing MTU characteristics of the data communication network, for example as aforementioned in an iterative manner.

15 [0089] According to an embodiment, the at least one transmitter and/or the data communication system is operable periodically to reprobe the maximum supported segment size of the entire communication route, and to adjust dynamically the size of the data packets pursuant to the reprobated maximum supported segment size of the entire communication route.

[0090] It will be appreciated that an empty data packet is not sent, unless a given transfer protocol or a given command protocol specifically requires empty data packets to be sent, for example, for keeping a connection open to prevent a time-out and forced disconnection.

20 [0091] According to an embodiment, the data communication network is implemented, at least in part, as a peer-to-peer ("P2P") network. In this embodiment, at least a portion of the entire communication route is implemented as a peer-to-peer communication path.

25 [0092] It will be appreciated that the data communication system is not restricted to a certain type of the data communication network, and does not require any particular transport protocol. As an example, the data communication system is useable with the contemporary Internet network, wherein various mutually different transfer protocols are utilized, and wherein very large amounts of mutually different types of data are transferred. However, the data communication system is not limited to the aforementioned Internet network, but can be used with other types of data communication networks. As an example, the data communication system is susceptible to being employed in telecommunications networks that do not utilize the HyperText Transfer Protocol (HTTP), Transmission Control Protocol/Internet Protocol (TCP/IP) and similar.

30 [0093] Moreover, in an example, the at least one transmitter and the at least one receiver can be implemented as user devices. Examples of such user devices include, but are not limited to, scientific apparatus, digital cameras, digital video cameras, mobile phones, smart telephones, Mobile Internet Devices (MID's), tablet computers, Ultra-Mobile Personal Computers (UMPC's), phablet computers, Personal Digital Assistants (PDA's), web pads, Personal Computers (PC's),
35 handheld PC's, laptop computers, desktop computers, and large-sized touch screens with embedded PC's. Such scientific apparatus include, for example genetic sequencing apparatus, biometric measurement apparatus, X-ray imaging apparatus, ultrasonic imaging apparatus, but not limited thereto.

40 [0094] Furthermore, examples of the mutually different types of data include, but are not limited to, control commands, broadcast messages, audio data, video data, text data, file data and/or playback data. In an embodiment, the mutually different types of data are prioritized in a descending order as follows: control commands > broadcast messages > audio data > video data > text data > file data > playback data.

[0095] According to an embodiment, the mutually different priorities of the mutually different types of data are implemented in a priority order substantially as defined by:

45

Prioritization code	Information type
Higher priority	Reserved 0
	Control command
	Broadcast message
	Audio data
	Video data
	Reserved 5
	Text data

50

55

(continued)

Prioritization code	Information type
	File data
Lower priority	Playback data

5

[0096] In the above table, the information types '*Reserved 0*' and '*Reserved 5*' correspond to priorities that are reserved for certain types of data. As an example, the information type '*Reserved 0*' may be used for emergency messages, wherein the emergency messages have a highest priority for transmission. However, other priority orders are feasible, for example text data placed at a higher priority than audio data, for data communication systems of rather lower bandwidth, for example as in sub-sea apparatus, diving equipment and such like, wherein divers are provided with head-up displays in their visors.

10

[0097] For illustration purposes only, there will next be described an example of how priorities are defined in a data communication system pursuant to embodiments of the present disclosure. In this example, the data communication system is implemented in a Starwindow® system; "*Starwindow*" is a registered trademark. The Starwindow® system is concerned with offering a video-based real-time telepresence experience, namely a type of video-conferencing experience, for two or more simultaneous users.

15

[0098] In the example herein, the data communication system is configured to use a common application layer protocol, for example, as used in contemporary Internet communication, namely the HTTP. This means that the data communication system and its associated infrastructure will not be incompatible with different operating systems, firewalls or anti-virus software when employing embodiments of the present disclosure. Moreover, as aforementioned, embodiments of the present disclosure are not limited to the Internet, and alternatively, or additionally, are operable to communicate via other types of communication network, for example proprietary dedicated high-security data networks. Such other types of communication network includes, for example, dedicated emergency services communication networks, military communication networks, direct satellite data communication networks and similar.

20

[0099] Moreover, the HTTP processes data transmission by using a POST request method, and processes data reception by using a GET request method. Optionally, the aforementioned Starwindow® system uses these methods, wherein a "*content transfer encoding*" section of given content is implemented in optimally-sized chunks using a form of chunked transfer-coding, for example, as will be described later in conjunction with a next example. In this regard, a data connection is set up, for example, by utilizing the HTTP as described in reference [9], and a data communication system and associated method as described in reference [10].

25

[0100] Moreover, in order to be able to implement the data communication system in the Starwindow® system, mutually different types of data are prioritized and assigned prioritization codes. Various algorithms are optionally used to rank priorities of the different types of data. The priorities are ranked in a bottom-up or a top-down manner, or in any other suitable manner that clearly indicates a priority of a given type of data as compared with other types of data.

35

[0101] Optionally, the priorities of the different types of data are ranked based on at least one of: life-times of the different types of data, permissible latencies of the different types of data, formats of the different types of data, time-to-live expectations of the different types of data, required response times for the different types of data, and/or importance of content of the different types of data.

40

[0102] As regards time-to-live expectations of the different types of data, the outdated of data needs to be taken into consideration. In a practical implementation, for example in a case where a transmission pipeline operates more slowly than data can be produced, an accumulation of time-critical data that has been produced can efficiently be prevented in the following ways:

45

(a1) A time-critical section of a data stream is not assembled to a data pack to be optimized by using an Add function if the time-critical section of the data stream has been outdated or becomes outdated because of a delay in delivery. For example, audio data can be defined to be outdated in a period in a range of 10 milliseconds to 30 milliseconds;

50

(a2) A time-critical section of a data stream is not added to a memory to wait for the assembly if an accumulated data size in bytes or as parts of a stream of queuing data exceeds an outdated limit set for the time-critical section; and

(b) A time-critical section of a data stream is added to a transmission pipeline by using the Add function; but if there are outdated sections of the data stream in the pipeline, then they are removed from the pipeline, starting with the oldest, progressing towards the youngest.

55

[0103] When the data communication system is operated as described above, then there is no need to set a time

stamp for the sections of the data stream; if time stamps are used, then the inspection of the time stamps potentially hampers the other processes of a computer processing unit (CPU) of the data communication system. When the functionality is implemented as described above in items (a) and (b), the processing of outdated data indeed is advantageously executed without time stamps, thereby decreasing extraneous processor loads.

5 [0104] In an example where control commands enable a real-time functionality of a software program of the data communication system, the control commands are considered more important than audio data and, therefore, are given a relatively higher priority. In another example, audio data for a teleconference is given a higher priority over video data, as a time-to-live of the audio data is only a few tenths of a second. A high prioritization of the audio data is desirable to reduce delays that could otherwise render the audio unintelligible, for example, when undertaken as an oral dialogue.
10 In yet another example, in a real-time control system, real-time sensor data is given a higher priority over archive data. In a yet another example, test data that is of more interest to a given receiver is given a higher priority over extraneous advertisement content.

15 [0105] Optionally, when assigning the prioritization codes, a lowest prioritization code is assigned to a type of data that has a highest priority. In this regard, the prioritization codes can be implemented, for example, as defined in an example table below.

Prioritization code	Information type
0x00	Reserved 0
0x01	Control command
0x02	Broadcast message
0x04	Audio data
0x08	Video data
0x10	Reserved 5
0x20	Text data
0x40	File data
0x80	Playback data

20
25
30
35 [0106] In the example table above, control commands are more important than broadcast messages, which are more important than audio data, which is more important than video data. This implies that even when there would be video data available to be transmitted, control commands, broadcast messages and audio data will be transmitted before the video data.

[0107] As an example, the aforementioned Starwindow® system is configured in a manner that, under normal circumstances, a data packet to be transmitted includes control commands, audio data and video data. Optionally, in possibly changing circumstances, a data packet might include only control commands and audio data, thereby leaving no room for video data until a next data packet.

[0108] In this manner, types of data that are more important from a perspective of a given receiver are prioritized over other types of data.

40
45 [0109] Furthermore, at least one transmitter of the data communication system is operable to take into account priorities of different types of data that are available to be written or transmitted when constructing a data packet from data chunks of the different types of data. Correspondingly, when at least one receiver receives the data packet, the at least one receiver is operable to process the received data packet to unpack the different types of data in a prioritized manner. The at least one receiver is then operable to process the data chunks of the different types of data, and construct data streams of the different types of data from the data chunks as per an order in which the data chunks occur in the data packet. The at least one receiver is then operable to process the data streams further after the data streams have been constructed from the data chunks; for example, in the Starwindow® system, audio data is decompressed and played, while video data is decompressed and displayed.

50
55 [0110] Moreover, optionally, a given type of data is delivered to a given receiver in a form of a plurality of data chunks that are included in a single data packet. Alternatively, optionally, the given type of data is delivered to the given receiver in a form of a single data chunk that is included in a single data packet.

[0111] Moreover, optionally, a given data packet does not include any separate piece of information for expressing priorities of different types of data included within the given data packet. Optionally, prioritization codes of the different

types of data can be delivered inside their respective data chunks or inside headers of the data chunks. Optionally, information for expressing priorities of different types of data included within the given data packet are communicated via a mutually different data communication channel to that employed for communicating the data packets including a plurality of different types of data.

5 [0112] For illustration purposes only, there will now be considered an example wherein a data communication system is implemented pursuant to embodiments of the present disclosure. One such example has been illustrated in conjunction with FIGs. 5A-C. At least one transmitter of the data communication system is provided with mutually different types of data to be written or transmitted to at least one receiver of the data communication system. In the example herein, a situation is considered, wherein the mutually different types of data include audio data, video data, text data and file data, and a descending order of priorities for the different types of data is: audio data, video data, text data, file data.

10 [0113] The at least one transmitter splits the mutually different types of data into optimally-sized chunks, namely splits the audio data into optimally-sized audio chunks, the video data into optimally-sized video chunks, the text data into optimally-sized text chunks, and the file data into optimally-sized file chunks. For this purpose, the at least one transmitter determines sizes of chunks for each type of data, while taking into account the priorities of the different types of data and relative amounts of data of the different types of data. In other words, the sizes of the data chunks may vary, if required. Such varying in size of data chunks increases flexibility, even though delivery of information about the sizes of the data chunks slightly increases an overhead for data transmission. By using optimally-sized data chunks, the generation of data packets can be controlled.

15 [0114] Beneficially, the chunk sizes are different for the different types of data. As an example, in a video conference, audio data is more time-critical as compared to video data. Moreover, a considerably less amount of the audio data is generated as compared to the video data, for example, as regards the amount of data in bytes. Therefore, it is beneficial to split the audio data into smaller chunks as compared to the video data.

20 [0115] Moreover, the chunk sizes need not be same for a same given type of data. As an example, all audio chunks need not be of a same size. Likewise, all video chunks need not be of a same size, and so on. When the size of chunks varies, information indicative of their sizes is delivered between the at least one transmitter and the at least one receiver. Otherwise, the size of chunks is predefined and is not required to be delivered.

25 [0116] When the data communication system employs the HTTP, the chunks not only include data to be written or transmitted, but also include associated header information. For a given chunk, its associated header information may, for example, include the chunk size or a length of the given chunk, and bytes that indicate that the given chunk has ended. Moreover, optionally, a given chunk includes information about a given type of data that is included in the given chunk, thereby enabling a given receiver to handle the given type of data properly. Alternatively, optionally, the information about the given type of data can be delivered to the given receiver using other methods, for example, within a packet header, namely a header of a data packet within which the given chunk is included.

30 [0117] Furthermore, the at least one transmitter assembles at least one data packet from the chunks of the different types of data, until a size of the at least one data packet approaches substantially a maximum supported segment size of an entire communication route through a data communication network from the at least one transmitter to the at least one receiver. In other words, the at least one transmitter includes within the at least one data packet as many chunks as possible, until the size of the at least one data packet reaches the maximum supported segment size. Once the size of the at least one data packet reaches the maximum supported segment size, no further chunk can be added regardless of its priority.

35 [0118] Moreover, when the at least one data packet is constructed, chunks having a highest priority amongst available chunks are added first, and are followed by chunks having a lower priority going towards a lowest priority. As a result, the at least one data packet is constructed in a manner that chunks having different priorities are included within the at least one data packet.

40 [0119] A situation potentially arises, wherein the at least one data packet includes chunks of data of only one priority or includes a single chunk that alone is substantially as large as the maximum supported segment size. In this regard, the at least one transmitter splits the different types of data into optimally-sized chunks in a manner that chunks having a lower priority can also be included within the at least one data packet.

45 [0120] Moreover, there might arise a situation wherein one or more chunks that are already inserted into a given data packet, during construction, have a lower priority than a new chunk that is available to be written or transmitted. In such a case, the new chunk is optionally inserted before the already inserted chunks, as the new chunk has a higher priority over the already inserted chunks. Beneficially, a packet header may be employed, wherein lengths of data of different priorities are expressed with only a few bits. Thus, the packet header does not need to state prioritization codes and the lengths of individual chunks that occur at various positions in the data packet.

50 [0121] In this manner, the at least one transmitter assembles data packets from the chunks of the different types of data in a prioritizing manner, wherein at least one of the data packets includes different types of data that have different required response times and different time-to-live expectations. This enables the data communication system to use a maximal data transfer capacity of the data communication network. This potentially enables the data communication

system to be implemented, for example, for a video conference or a video streaming service simultaneously with other communication services.

[0122] This is particularly beneficial for software applications that produce various mutually different types of data that require different response times when being transmitted from a given transmitter to a given receiver. The data communication system is beneficially employed to deliver data packets from the given transmitter to the given receiver in a manner that an operation of such software applications is not hampered or blocked. Examples of such software applications include, but are not limited to, Apple TV, Skype™, TeamViewer, and Starwindow®; "Apple TV", "Skype™", "TeamViewer", "Starwindow®" include registered trademarks.

[0123] Moreover, optionally, the at least one transmitter fragments data packets that are too large, when the at least one transmitter operates as a node between two different communication protocols, for example, such as an X.25 network and a TCP/IP network. As an example, the at least one transmitter can be implemented as a bridge between a closed authority network and the public Internet during emergencies, for example, when real-time audio-visual information is optionally transmitted directly from a private citizen to an emergency center or to a moving emergency vehicle. As another example, the at least one transmitter can be implemented in a situation where a bank account validation and/or transactions from payment terminal devices of a large department store chain are transmitted in real-time from department stores to credit card companies or banks that operate inside an external, closed network.

[0124] Furthermore, according to an embodiment, the at least one transmitter is operable to generate the data packets, wherein at least a portion of the data packets is encrypted, and the at least one receiver is operable to decrypt the at least a portion of the data packets when the data packets are received at the at least one receiver.

[0125] Optionally, in this regard, the size of the data packets having encrypted content is predefined and fixed. This makes it as difficult as possible to break an encryption employed by using a brute force technique. As an example, in a brute force technique, an attacker implements a data packet, wherein content of the data packet is as small-sized and probable as possible. The attacker then predicts the content of the data packet, and creates an encryption key that produces corresponding encrypted content that is same as an original encrypted content of the data packet, thereby breaking the encryption.

[0126] When data packets of a predefined, fixed size are constructed, predicting the content of the data packets becomes as difficult as possible. Moreover, an entropy of the data is made as high as possible, thereby making it as difficult as possible to break the encryption.

[0127] If a sufficient amount of a particular type of data is not available for constructing a given data packet, the given data packet is optionally padded with additional data until the predefined, fixed size of the given data packet is reached. Padding the given data packet in such a manner is beneficial from a viewpoint of encryption.

[0128] Moreover, according to an embodiment, the at least one transmitter is operable to employ a maximum delay before sending a given data packet, and is operable to pad the given data packet to a maximum segment size if insufficient data has been provided for the mutually different types of data when the maximum delay is reached. In other words, when constructing the given data packet, the at least one transmitter does not wait for incoming data of any particular type beyond the maximum delay. This potentially prevents any extraneous processor load on the at least one transmitter, which occurs in conventional data communication systems where data is collected and assembled aggressively before transmission. This potentially allows other processes to use computing resources of the at least one transmitter when no data is available to be written or transmitted.

[0129] It is evident that during periods of time when the other processes are being executed, new data is piled up, namely accumulated, to be written or transmitted, for example, in real-time communication, regardless of whether or not a thread implementing the assembling has been commanded to return to its assembling task as soon as possible. Typically, operating systems have numerous processes running in their own threads and queuing for processing time, wherein each thread is provided the processing time to fulfill its task. Therefore, it is advantageous to implement the assembling of data in its own thread, and to let an operating system of the at least one transmitter to prioritize the tasks, while considering the overall computing resources of the at least one transmitter.

[0130] Moreover, as incomplete data packets, namely data packets having an amount of data smaller than the maximum segment size, are not sent, extraneous load on the data communication network is potentially prevented.

[0131] When data is available for transmission, no waiting periods occur, and the available data is sent immediately after having been inserted into a given data packet. If all of the available data does not fit in the given data packet, a portion of the available data that fits is inserted into the given data packet, while a remaining portion of the available data is inserted into a next data packet.

[0132] Optionally, a maximum delay to be employed for a given data packet is varied depending on a type of data that is included within the given data packet. As an example, if the type of data already included within the given data packet is highly time-critical, a shorter maximum delay is employed, and *vice versa*.

[0133] If a too short maximum delay is employed, a large number of data packets will be padded by default. This would potentially hamper data of other processes from being communicated. On the other hand, if a too long maximum delay is employed, delivery of the data packets will be delayed by default. Therefore, the maximum delay to be employed is

selected optimally, so as to prevent frequent padding of the data packets, while also preventing long waiting periods for a buffer to fill before a data packet can be filled.

[0134] Employing the maximum delay before sending a given data packet is particularly beneficial for fast data communication networks. In slow data communication networks, there is typically more data to be sent than data that can be transmitted even with completely full data packets.

[0135] Furthermore, optionally, the data communication system addresses problems associated with data delivery and synchronization in situations where a given receiving connection and a given transmitting connection are run in mutually different threads. As a result, a mode of operation of the data communication system is inherently thread-safe.

[0136] The data communication system is optionally used in relay and proxy server arrangements, wherein data is optionally retransmitted from a given receiver to a given transmitter, and wherein a given receiving connection and a given transmitting connection are run in their own connection threads. As regards data delivery, these connection threads are optionally locked for a duration in which the data is written and/or read. Alternatively, optionally, the connection threads are not locked; instead, a thread-safe list is used and locked during writing and/or reading. This potentially enables a considerably faster and simpler thread-safe implementation pursuant to embodiments of the present disclosure.

[0137] The aforementioned prioritization and optimized packet construction process is beneficially run in parallel, utilizing multiple processor cores at a same given time, wherein multiple threads of execution make use of thread-safe inter-thread communication, thereby avoiding time-consuming lock situations, thus speeding up the construction of data packets. However, the method pursuant to embodiments of the present disclosure does not require that multiple processor cores be available for performing data processing.

[0138] Furthermore, optionally, the data communication system can be integrated, or at least synchronized, with a given codec. For illustration purposes only, there will now be considered an example wherein a given encoder of the given codec is integrated with the at least one transmitter, a given decoder of the given coded is integrated with the at least one receiver, and two frame buffers have been employed at the at least one transmitter. This integration or synchronization of the data communication system and the given codec is beneficially, optionally, run in parallel, in multiple processor cores, as explained above. However, such integration or synchronization is employable also in data communication systems that do not have multiple processor cores available.

[0139] In the example herein, a situation is considered wherein the given encoder encodes a first video frame to generate corresponding encoded video frame. The given encoder then inserts the encoded video frame as a first video chunk in a data packet having one or more audio chunks when there is a sufficient space available in the data packet for the first video chunk. Likewise, the encoder encodes a second video frame, and inserts corresponding encoded video frame as a second video chunk into a next data packet.

[0140] If the given decoder delivers an acknowledgement of proper receipt and processing of the first video frame before or during the encoding and delivery of the second video frame, the given encoder is able to continue with the encoding and delivery of a third video frame directly after finishing the delivery of the second video frame. If the given encoder does not receive any acknowledgement during the encoding and delivery of the second video frame, the given encoder waits for the acknowledgement of the first video frame to arrive before beginning to encode and deliver the third video frame.

[0141] In general, the given encoder encodes and delivers an N^{th} video frame, wherein ' N ' is a number larger than a number of frame buffers employed at the at least one transmitter, only after acknowledgements of previously-delivered video frames have been received from the given decoder.

[0142] In a second aspect, embodiments of the present disclosure provide a transmitter for use in a data communication system, the transmitter being operable to communicate data packets via a data communication network and/or a data carrier to at least one receiver, wherein the transmitter is operable to include within at least one of the data packets a plurality of mutually different types of data,

characterized in that the plurality of mutually different types of data have mutually different priorities.

[0143] By "*mutually different types of data*" is meant data of mutually different content, structure, format, for example encoding format, temporal characteristics (for example a video sequence or an audio sample), multi-dimensional data (for example relating to 3-dimensional biological scanning images) and so forth.

[0144] By "*mutually different priorities*" is meant an order in which given data to be communicated is selected to be processed and thereafter communicated in a data communication system.

[0145] Optionally, the transmitter is operable to communicate to the at least one receiver information that is indicative of the mutually different priorities of the plurality of mutually different types of data.

[0146] Optionally, the transmitter is operable to include the information that is indicative of the mutually different priorities of the plurality of mutually different types of data within the at least one of the data packets.

[0147] According to an embodiment, the transmitter is operable to include the information to be indicative of at least one of: life-times of the different types of data, permissible latencies of the different types of data, formats of the different types of data, time-to-live expectations of the different types of data, required response times for the different types of data.

[0148] Optionally, the transmitter is operable to generate the at least one of the data packets by employing a multistage

process that includes:

- (i) providing data to at least one data stream;
- (ii) compressing the at least one data stream; and
- (iii) assembling the at least one data stream to generate the data packets for communicating from the transmitter to the at least one receiver.

[0149] According to an embodiment, the transmitter is operable to construct the data packets as determined by configuration data received from the at least one receiver and/or the data communication network.

[0150] According to an embodiment, the transmitter is operable to assemble the data packets until their size approaches substantially a maximum segment size of the data communication network before sending the data packets to the at least one receiver.

[0151] According to an embodiment, the transmitter is operable to adjust a size of the data packets to a maximum supported segment size of an entire communication route through the data communication network from the transmitter to the at least one receiver.

[0152] According to an embodiment, the transmitter is operable periodically to reprobe the maximum supported segment size of the entire communication route, and to adjust dynamically the size of the data packets pursuant to the reprobated maximum supported segment size of the entire communication route.

[0153] According to an embodiment, the mutually different priorities are implemented in a priority order substantially as defined by:

Prioritization code	Information type
Higher priority	Reserved 0
	Control command
	Broadcast message
	Audio data
	Video data
	Reserved 5
	Text data
	File data
Lower priority	Playback data

[0154] According to an embodiment, the transmitter is operable to employ a maximum delay before sending a given data packet, and is operable to pad the given data packet to a maximum segment size if insufficient data has been provided for the mutually different types of data when the maximum delay is reached.

[0155] According to an embodiment, the transmitter is operable to generate the data packets, wherein at least a portion of the data packets is encrypted for subsequent decryption at the at least one receiver.

[0156] Optionally, the transmitter can be implemented as a user device. Examples of such user devices include, but are not limited to, mobile phones, smart telephones, MID's, tablet computers, UMPC's, phablet computers, PDA's, web pads, PC's, handheld PC's, laptop computers, desktop computers, and large-sized touch screens with embedded PC's.

[0157] In a third aspect, embodiments of the present disclosure provide a receiver for use in a data communication system, wherein the receiver is operable to process at least one data packet received via a data communication network and/or a data carrier from at least one transmitter, wherein the at least one data packet includes a plurality of mutually different types of data, and the receiver is operable to process the mutually different types of data to mutually separate the mutually different types of data, characterized in that the plurality of mutually different types of data have mutually different priorities.

[0158] By "*mutually different types of data*" is meant data of mutually different content, structure, format, for example encoding format, temporal characteristics (for example a video sequence or an audio sample), multi-dimensional data (for example relating to 3-dimensional biological scanning images) and so forth.

[0159] By "*mutually different priorities*" is meant an order in which given data to be processed is selected to be correspondingly processed in a data communication system.

[0160] Optionally, the mutually different types of data are separated out in the receiver to corresponding channels, for example, such as meta data, audio data, video data, parameter data.

[0161] Optionally, the receiver is operable to receive information that is indicative of the mutually different priorities of the plurality of mutually different types of data, and to process the plurality of mutually different types of data according to the information that is indicative of the mutually different priorities of the plurality of mutually different types of data.

[0162] Optionally, the receiver is operable to process the information that is indicative of the mutually different priorities of the plurality of mutually different types of data, wherein the information is included within the at least one data packet.

[0163] According to an embodiment, the receiver is operable to unpack the at least one data packet to extract data chunks of the mutually different types of data from the at least one data packet, and to construct data streams of the mutually different types of data from the data chunks as per an order in which the data chunks occur in the at least one data packet. Optionally, the at least one receiver is then operable to process the data streams further after the data streams have been constructed from the data chunks.

[0164] Optionally, the receiver is operable to unpack the data packets in an order in which the data packets arrive at the receiver. Alternatively, optionally, if the data packets are numbered, the receiver is operable to unpack the data packets in an order as designated by their associated numbers.

[0165] Optionally, the receiver is implemented without using a codec. In such a case, different encoders and other data sources deliver their data to their respective delivery queues separately and asynchronously.

[0166] Alternatively, optionally, the receiver is integrated with a given codec, or at least synchronized with the given codec. In such a case, the receiver has knowledge of, namely possesses information that is indicative of, when a next chunk is arriving. Such synchronized knowledge is advantageously utilized to improve, for example to optimize, construction of data packets and to reduce, for example to minimize, any delays in transmission of time-critical data.

[0167] According to an embodiment, the receiver is operable to decrypt at least a portion of the at least one data packet when the at least a portion of the at least one data packet is encrypted.

[0168] According to an embodiment, the receiver is operable to send, to the at least one transmitter, configuration data for use in constructing the at least one data packet.

[0169] Optionally, the receiver can be implemented as a user device. Examples of such user devices include, but are not limited to, mobile phones, smart telephones, MID's, tablet computers, UMPC's, phablet computers, PDA's, web pads, PC's, handheld PC's, laptop computers, desktop computers, and large-sized touch screens with embedded PC's.

[0170] In a fourth aspect, embodiments of the present disclosure provide a method of communicating data, the method comprising communicating data packets via a data communication network and/or a data carrier from at least one transmitter to at least one receiver, wherein the method further comprises including within at least one of the data packets a plurality of mutually different types of data, characterized in that the plurality of mutually different types of data have mutually different priorities.

[0171] By "*mutually different types of data*" is meant data of mutually different content, structure, format, for example encoding format, temporal characteristics (for example a video sequence or an audio sample), multi-dimensional data (for example relating to 3-dimensional biological scanning images) and so forth.

[0172] By "*mutually different priorities*" is meant an order in which given data to be communicated is selected to be processed and thereafter communicated in a data communication system.

[0173] Optionally the method further includes communicating to the at least one receiver information that is indicative of the mutually different priorities of the plurality of mutually different types of data.

[0174] Optionally, the method includes incorporating the information that is indicative of the mutually different priorities of the plurality of mutually different types of data within the at least one data packet.

[0175] According to an embodiment, the method further comprises including the information to be indicative of at least one of: life-times of the different types of data, permissible latencies of the different types of data, formats of the different types of data, time-to-live expectations of the different types of data, required response times for the different types of data.

[0176] Optionally, the method further comprises generating the at least one of the data packets by employing a multistage process that includes:

- (i) providing data to at least one data stream;
- (ii) compressing the at least one data stream; and
- (iii) assembling the at least one data stream to generate the data packets for communicating from the at least one transmitter to the at least one receiver.

[0177] According to an embodiment, the method further comprises constructing the data packets as determined by configuration data received from the at least one receiver and/or the data communication network.

[0178] According to an embodiment, the method further comprises assembling the data packets until their size approaches substantially a maximum segment size of the data communication network before sending the data packets to the at least one receiver.

[0179] According to an embodiment, the method further comprises adjusting a size of the data packets to a maximum supported segment size of an entire communication route through the data communication network from the at least one transmitter to the at least one receiver.

5 [0180] According to an embodiment, the method further comprises periodically reprobng the maximum supported segment size of the entire communication route, and adjusting dynamically the size of the data packets pursuant to the reprobng maximum supported segment size of the entire communication route.

[0181] According to an embodiment, the data communication network communicates the data packets without splitting the data packets into fragments.

10 [0182] According to an embodiment, the data communication network is implemented, at least in part, as a peer-to-peer network.

[0183] According to an embodiment, the method further comprises implementing the mutually different priorities in a priority order substantially as defined by:

15

Prioritization code	Information type
Higher priority	Reserved 0
	Control command
20	Broadcast message
	Audio data
	Video data
	Reserved 5
25	Text data
	File data
Lower priority	Playback data

30

[0184] According to an embodiment, the method further comprises generating the data packets at the at least one transmitter, wherein at least a portion of the data packets is encrypted, and decrypting the at least a portion of the data packets at the at least one receiver when the data packets are received at the at least one receiver.

35 [0185] According to an embodiment, the method further comprises employing a maximum delay before sending a given data packet, and padding the given data packet to a maximum segment size if insufficient data has been provided for the mutually different types of data when the maximum delay is reached.

[0186] In a fifth aspect, embodiments of the present disclosure provide a method of operating a transmitter, the method comprising communicating data packets via a data communication network and/or a data carrier to at least one receiver, wherein the method further comprises including within at least one of the data packets a plurality of mutually different types of data, characterized in that the plurality of mutually different types of data have mutually different priorities.

40 [0187] By "*mutually different types of data*" is meant data of mutually different content, structure, format, for example encoding format, temporal characteristics (for example a video sequence or an audio sample), multi-dimensional data (for example relating to 3-dimensional biological scanning images) and so forth.

45 [0188] By "*mutually different priorities*" is meant an order in which given data to be communicated is selected to be processed and thereafter communicated in a data communication system.

[0189] Optionally, the method further includes communicating to the at least one receiver information that is indicative of the mutually different priorities of the plurality of mutually different types of data.

[0190] Optionally, the method further includes incorporating the information that is indicative of the mutually different priorities of the plurality of mutually different types of data within the at least one data packet.

50 [0191] According to an embodiment, the method further comprises including the information to be indicative of at least one of: life-times of the different types of data, permissible latencies of the different types of data, formats of the different types of data, time-to-live expectations of the different types of data, required response times for the different types of data.

[0192] Optionally, the method further comprises generating the at least one of the data packets by employing a multistage process that includes:

55

- (i) providing data to at least one data stream;
- (ii) compressing the at least one data stream; and

(iii) assembling the at least one data stream to generate the data packets for communicating from the transmitter to the at least one receiver.

[0193] According to an embodiment, the method further comprises constructing the data packets as determined by configuration data received from the at least one receiver and/or the data communication network.

[0194] According to an embodiment, the method further comprises assembling the data packets until their size approaches substantially a maximum segment size of the data communication network before sending the data packets to the at least one receiver.

[0195] According to an embodiment, the method further comprises adjusting a size of the data packets to a maximum supported segment size of an entire communication route through the data communication network from the transmitter to the at least one receiver.

[0196] According to an embodiment, the method further comprises periodically reprobng the maximum supported segment size of the entire communication route; and adjusting dynamically the size of the data packets pursuant to the reprobng maximum supported segment size of the entire communication route.

[0197] According to an embodiment, the method further comprises implementing the mutually different priorities in a priority order substantially as defined by:

Prioritization code	Information type
Higher priority	Reserved 0
	Control command
	Broadcast message
	Audio data
	Video data
	Reserved 5
	Text data
	File data
Lower priority	Playback data

[0198] According to an embodiment, the method further comprises employing a maximum delay before sending a given data packet; and padding the given data packet to a maximum segment size if insufficient data has been provided for the mutually different types of data when the maximum delay is reached.

[0199] According to an embodiment, the method further comprises generating the data packets, wherein at least a portion of the data packets is encrypted for subsequent decryption at the at least one receiver.

[0200] In a sixth aspect, embodiments of the present disclosure provide a method of operating a receiver, wherein the method comprises:

processing at least one data packet received via a data communication network and/or a data carrier from at least one transmitter, wherein the at least one data packet includes a plurality of mutually different types of data; and

processing the mutually different types of data to mutually separate the mutually different types of data included in the at least one data packet,

characterized in that the plurality of mutually different types of data have mutually different priorities.

[0201] By "mutually different types of data" is meant data of mutually different content, structure, format, for example encoding format, temporal characteristics (for example a video sequence or an audio sample), multi-dimensional data (for example relating to 3-dimensional biological scanning images) and so forth.

[0202] By "mutually different priorities" is meant an order in which given data to be processed is selected to be correspondingly processed in a data communication system.

[0203] Optionally, the method includes receiving at the receiver information that is indicative of the mutually different priorities of the plurality of mutually different types of data; and processing the mutually different types of data according

to the information that is indicative of the mutually different priorities of the plurality of mutually different types of data.

[0204] Optionally, in the method, the information that is indicative of the mutually different priorities of the plurality of mutually different types of data is included within the at least one data packet.

[0205] According to an embodiment, the method further comprises unpacking the at least one data packet to extract data chunks of the mutually different types of data from the at least one data packet, and constructing data streams of the mutually different types of data from the data chunks as per an order in which the data chunks occur in the at least one data packet.

[0206] According to an embodiment, the method further comprises decrypting at least a portion of the at least one data packet when the at least a portion of the at least one data packet is encrypted.

[0207] According to an embodiment, the method further comprises sending, to the at least one transmitter, configuration data for use in constructing the at least one data packet.

[0208] Moreover, optionally, the method is advantageously used alone. However, sometimes it is beneficial to use the method with a data communication system and method as described in reference [10]. In such cases, associated acknowledgements of received and processed data packets are delivered from a given receiver to a given transmitter, for example, as described earlier. This potentially enables the given transmitter to minimize delays in transmission while still using its previously known amount of buffers.

[0209] As an example, a given encoder at the given transmitter first encodes data as long as its buffers have been filled. Once the buffers are filled, the given encoder does not start a new batch of processing, for example, for video frames before at least one acknowledgement of a properly received and processed video frame has been received from a given decoder at the given receiver. This potentially enables the given transmitter to allocate a previously known amount of buffers, for example, for processing video frames. As a result, the video frames are processed only when they are required to be processed, while using a known amount of buffers.

[0210] In a seventh aspect, embodiments of the present disclosure provide a computer program product comprising a non-transitory computer-readable storage medium having computer-readable instructions stored thereon, the computer-readable instructions being executable by a computerized device comprising processing hardware to execute any of the aforementioned methods.

[0211] Next, embodiments of the present disclosure will be described with reference to figures.

[0212] Referring to FIG. 2, there is shown a schematic illustration of a data communication system **200**, in accordance with an embodiment of the present disclosure. The data communication system **200** includes at least one transmitter, depicted as a transmitter **202** in FIG. 2.

[0213] The transmitter **202** communicates data packets via a data communication network **204** to at least one receiver, depicted as a receiver **206** in FIG. 2.

[0214] FIG. 2 is merely an example, which should not unduly limit the scope of the present disclosure. It is to be understood that the illustration of the data communication system **200** is provided as an example and is not limited to a specific number and/or arrangement of transmitters, receivers, and data communication networks. A person skilled in the art will recognize many variations, alternatives, and modifications of embodiments of the present disclosure. In an alternative implementation, the transmitter **202** communicates data packets via a data carrier to at least one receiver.

[0215] Referring now to FIGs. 3A and 3B, there is provided a flow chart depicting steps of a method of communicating data, in accordance with an embodiment of the present disclosure. The method is depicted as a collection of steps in a logical flow diagram, which represents a sequence of steps that can be implemented in hardware, software, or a combination thereof, for example as aforementioned.

[0216] The method is implemented via at least one transmitter of a data communication system.

[0217] At a step **302**, mutually different types of data that are available to be written or transmitted are prioritized.

[0218] Optionally, in accordance with the step **302**, chunks of the different types of data are queued in a priority queue in a manner that chunks of a given type of data of a highest priority from amongst the different types of data are prioritized over other chunks.

[0219] At a step **304**, a chunk of the given type of data of the highest priority is inserted into a data packet.

[0220] Next, at a step **306**, it is checked whether or not a sufficient space is available in the data packet for a next chunk. If, at the step **306**, it is found that a sufficient space is available in the data packet, a step **308** is performed.

[0221] At the step **308**, it is checked whether or not a next chunk is available to be inserted before a maximum delay is reached.

[0222] If, at the step **308**, it is found that a next chunk is available to be inserted before the maximum delay is reached, the step **304** is performed. Correspondingly, the next chunk is inserted into the same data packet. Otherwise, if it is found that the next chunk is not available before the maximum delay is reached, a step **310** is performed.

[0223] If, at the step **306**, it is found that a sufficient space is not available in the data packet, the step **310** is performed.

[0224] At the step **310**, the data packet is transmitted to at least one receiver. Optionally, in accordance with the step **310**, the data packet is padded to a maximum supported segment size of an entire communication route through a given data communication network from the at least one transmitter to the at least one receiver, when required.

[0225] Next, at a step 312, it is checked whether or not any chunk is available to be written or transmitted. If, at the step 312, it is found that a next chunk is available, the step 304 is performed. Correspondingly, the next chunk is inserted into a next data packet. Otherwise, if it is found that no chunk is available, the processing stops.

5 [0226] The steps 302 to 312 are only illustrative and other alternatives can also be provided where one or more steps are added, one or more steps are removed, or one or more steps are provided in a different sequence without departing from the scope of the claims herein.

[0227] It will be appreciated that the aforementioned processing waits for new chunks only when no chunk is queued for transmission and there is enough time to be spent waiting. However, in most practical situations, data packets are constructed so fast that the maximum delay may not be required to be taken into consideration.

10 [0228] Referring now to FIG. 4, there is provided a flow chart depicting steps of a method of processing data packets, in accordance with an embodiment of the present disclosure. The method is depicted as a collection of steps in a logical flow diagram, which represents a sequence of steps that can be implemented in hardware, software, or a combination thereof, for example as aforementioned.

[0229] The method is implemented via at least one receiver of a data communication system that receives the data packets from at least one transmitter.

15 [0230] At a step 402, a data packet is received, wherein the data packet includes a plurality of mutually different types of data having mutually different priorities, optionally together with information that is indicative of the mutually different priorities of the plurality of mutually different types of data. Optionally, the information is provided independently of the data packet. Optionally, the information is not provided, and a default structure for the data packet is employed, wherein the default structure is defined a priori, namely before the data packet is sent from at least one transmitter to at least one receiver involved.

[0231] At a step 404, chunks of the mutually different types of data are extracted from the data packet.

[0232] Subsequently, at a step 406, data streams of the mutually different types of data are constructed from the chunks extracted at the step 404.

25 [0233] Next, at a step 408, it is checked whether or not a next data packet has been received at the at least one receiver. If, at the step 408, it is found that a next data packet has been received, the steps 404 and 406 are performed. Correspondingly, data chunks are extracted from the next data packet, and processed further to construct the data streams.

30 [0234] If, at the step 408, it is found that a next data packet has not been received, the processing either stops or waits to receive a next data packet until a given connection between the at least one transmitter and the at least one receiver is open.

[0235] The steps 402 to 408 are only illustrative and other alternatives can also be provided where one or more steps are added, one or more steps are removed, or one or more steps are provided in a different sequence without departing from the scope of the claims herein. Optionally, the method includes an additional step at which the data streams constructed at the step 406 are processed further, for example, to play audio data and to display video data at the at least one receiver.

[0236] Referring next to FIGs. 5A, 5B and 5C, there is shown a schematic illustration of an example of constructing data packets, in accordance with an embodiment of the present disclosure.

40 [0237] In the example illustrated in FIGs. 5A-C, a descending order of priorities of mutually different types of data is as follows: audio data, video data, text data, and file data.

[0238] In FIGs. 5A-C, there is shown a priority sending queue 502 of the different types of data, namely a queue where the different types of data are queued to be sent in a prioritized manner. The priority sending queue 502 includes chunks of the different types of data, namely two audio chunks, five video chunks, one text chunk and four file chunks shown in FIG. 5A.

45 [0239] In the illustrated example, it will be appreciated that:

- (i) each of the two audio chunks has a size of 160 bytes;
- (ii) a first video chunk has a size of 240 bytes, a second video chunk has a size of 180 bytes, a third video chunk has a size of 235 bytes, and each of a fourth and a fifth video chunk has a size of 285 bytes;
- 50 (iii) the text chunk has a size of 80 bytes; and
- (iv) each of the four file chunks has a size of 270 bytes.

55 [0240] A given transmitter extracts from the priority sending queue 502 chunks of the different types of data to construct data packets that are optimized to a maximum supported segment size of an entire communication route through a data communication network from the given transmitter to a given receiver.

[0241] In the illustrated example, it will be appreciated that the maximum supported segment size is 1460 bytes. As a result, a first data packet 504 includes the two audio chunks and first four video chunks, and is padded to the maximum supported segment size. Correspondingly, remaining chunks, namely the fifth video chunk, the text chunk and the four

file chunks, are assembled into a second data packet **506**, which is also padded to the maximum supported segment size. In this manner, the first data packet **504** and the second data packet **506** carry a maximal amount of data as regards their payload, and have a size of 1460 bytes each. In this regard, a size of header is also taken into account when the maximum supported segment size is used to enable optimally-sized packets to be delivered between the given transmitter and the given receiver.

[0242] FIG. 5A is merely an example, which should not unduly limit the scope of the present disclosure. A person skilled in the art will recognize many variations, alternatives, and modifications of embodiments of the present disclosure. In FIG. 5A, there is provided an illustration of how two data packets are constructed from an initial example sequence of data that has two audio chunks, five video chunks, one text chunk and four file chunks. On account of the priority of the audio data being the highest, both of the two audio chunks will go into the first data packet **504**, after which there is still room for four chunks that have the next highest priority, namely four chunks of the video data.

[0243] After this, the construction of the second data packet **506** can proceed. The second data packet **506** will contain the remaining chunks of the initial example sequence of data in the priority order, namely the video chunk first, followed by the text chunk and finally the four file chunks.

[0244] Next, in FIGs. 5B and 5C, there is provided an illustration of how data packets are constructed, for example in real time: in FIG. 5B, there is provided an illustration of the packet construction and sending of the first data packet **504** at a point in time T1, while, in FIG. 5C, there is provided an illustration of the packet construction and sending of the second data packet **506** at another point in time T2 (wherein $T2 > T1$), namely when the first data packet **504** has been sent further. The initial example sequence of data in FIG. 5B is the same as that in FIG. 5A. However, in FIG. 5B, there is provided an illustration of a situation where there is no room for the fourth video chunk in the first data packet **504**, for example when the maximum supported segment size is reduced to be in sync with a change in the data transfer capacity of the data communication network. In such a case, the first data packet **504** is optionally padded with padding bytes, so that the optimal packet size is reached. A section of the padding in the first data packet **504** is optionally replaced by the text data, namely the text chunk, if the padding is larger than the text chunk. Beneficially, a chunk that has the highest possible priority is selected to fill up the remaining space in the first data packet **504** before padding, if such a chunk can be found.

[0245] It will be appreciated that relative sizes of the chunks of the different types of data have been illustrated schematically in FIGs. 5A-C to visualize a fact that an optimized packet payload can contain data chunks of different sizes, and the sizes of the data chunks need not be the same for a same type of data.

[0246] In order to illustrate a real-time scenario, there will next be considered a situation wherein one new audio chunk and one new video chunk have arrived between the points in time T1 and T2, and are added to the priority sending queue **502** to wait for delivery.

[0247] Therefore, the first chunk to be added into the second data packet **506** in FIG. 5C will be the newly-arrived audio chunk, and the insertion of the video chunks will continue after the newly-arrived audio chunk has been inserted. With reference to FIG. 5C, all the remaining video chunks and the newly-arrived video chunk fit into the second data packet **506**, and there is still room for the text chunk and for the first two file chunks. The insertion of the chunks will then continue in such a manner that each new data packet to be sent will be filled with such chunks that are currently waiting for delivery and that have the highest priority from amongst the waiting chunks.

[0248] As stated earlier, time-critical chunks have a certain time-to-live limit, which has to be taken into account during the process of filling the data packets with chunks. Namely, if the time-to-live limit is imminent, then the current data packet will have to be filled, for example with padding bytes, and sent further immediately. Sometimes, because of the time-to-live limit, video chunks can sometimes be dropped from the priority queue **502** and never sent, if their data would already be outdated and/or if their synchronization with the remaining audio chunks would no longer be possible. In such a situation, it is more advantageous to drop those video chunks and to send newer video chunks that are synchronous with the remaining audio chunks.

[0249] Referring now to FIGs. 6A, 6B and 6C, there is shown a schematic illustration of an example of unpacking data packets, in accordance with an embodiment of the present disclosure.

[0250] In the illustrated example, a given receiver receives two data packets, depicted as a first data packet **602** and a second data packet **604**. The first data packet **602** includes two audio chunks and four video chunks, while the second data packet **604** includes one video chunk, one text chunk and four file chunks.

[0251] The data packets **602** and **604** are unpacked to extract the data chunks. The extracted chunks are then processed to construct data streams **606** of mutually different types of data, namely an audio data stream, a video data stream, a text data stream and a file data stream, as shown in FIGs. 6A-C.

[0252] In FIGs. 6B-C, there is provided an illustration of how data packets are unpacked, for example in real time, namely in a manner that the reception of the data packets **602** and **604** and the unpacking of the data packets **602** and **604** into the data streams **606** is shown for each data packet separately. In other words, the unpacking of each data packet occurs at that point in time when that data packet is received by the given receiver.

[0253] It will be appreciated that the data packets **602** and **604** in FIGs. 6B-C correspond to the data packets **504** and

506 in FIGs. 5B-C, respectively, for illustration purposes only. FIGs. 6A-C are merely an example, which should not unduly limit the scope of the present disclosure. A person skilled in the art will recognize many variations, alternatives, and modifications of embodiments of the present disclosure.

[0254] Furthermore, it will be appreciated that the data packets are constructed in such a manner that the entire size of the data packets is optimized. For example, if a data packet to be sent needs longer protocol headers or additional protocol headers, the payload size of the data packet is reduced accordingly. In this regard, FIGs. 7A and 7B provide an illustration of an example of how the size of the payload is adjusted if the size of the protocol headers changes. This might occur, for example, when some of the data packets are sent via different channels, using different network protocols and standards, and/or to different receivers.

[0255] Referring now to FIG. 7A, there are shown two data packets, whose entire packet sizes are indicated by 'X1' and 'X2'. The data packet on a left side has one header, denoted by 'A1', which leaves a section 'Y1' for the payload therein, whereas the data packet on a right side has two headers, denoted by 'A2' and 'A3', which leave a section 'Y2' for the payload therein. Therefore, the data packet on the left side has more room for the payload, as compared to the data packet on the right side.

[0256] In FIG. 7B, there is illustrated how the payload sections 'Y1' and 'Y2' are divided internally.

[0257] With reference to an upper part of FIG. 7B, the payload section 'Y1' has a header section, denoted by 'H', which is an internal header that is not a part of any public standard or network protocol. This internal header specifies properties of data chunks that follow it, and its size is included in the size of the payload. After the internal header 'H', four data chunks, denoted by 'A', 'I', 'I' and 'D', follow; 'A' indicates an audio chunk, 'I' indicates an image chunk and 'D' indicates a general data chunk. On the other hand, the payload section 'Y2' has an internal header, denoted by 'H', a control data chunk, denoted by 'C', an audio chunk, denoted by 'A' and two image chunks, denoted by 'I' and 'I'.

[0258] The composition of the payload sections 'Y1' and 'Y2' as depicted in the upper part of FIG. 7B is not the only way in which the internal headers and the data chunks can be inserted into the payload sections 'Y1' and 'Y2'. In a lower part of FIG. 7B, there is provided an illustration of a situation where each individual data chunk has its own small header specifying the properties of that data chunk, in which case a single large common internal header at the beginning of the packet payload is not required.

[0259] Optionally, when a transmitter of a data communication system pursuant to the present disclosure is operable to construct data packets for sending to a corresponding receiver, the transmitter performs a following sequence of data additions from steps S(1) to S(x) to form a given data packet, wherein x is an integer greater than unity:

Operation	Detail	Prioritization code
S1	add control commands	1
S2	add video data	8
S3	add audio data	4
S4	add video data	8
S5	add audio data	4
...
S(x)	assemble packet	

[0260] It will be appreciated that other numbers of steps are optionally employed.

[0261] The mutually different types of data in the steps S(2) to S(5) are added in an interleaved manner. The prioritization codes are either included in the given data packet, or are communicated independently of the data packet to the receiver.

[0262] HTTP chunked data transfer is beneficially employed for communicating the given data packet. Moreover, data compression is optionally applied either during add operations performed in the steps S(2) to S(5), or during assembly in the step S(x). Optionally, data compression is applied both during adding in the steps S(2) to S(5), and also during the assembly in the step S(x).

[0263] At the corresponding receiver, the given data packet is unpacked, by using the control commands, and different streams of data type are then reconstructed from portions of the given data packet by using the control commands.

[0264] Embodiments of the present disclosure are susceptible to being used for various purposes, including, though not limited to, enabling processing of prioritized data into data packets that are optimized to a maximum supported segment size of an entire communication route, so that time-critical data is duly delivered to a given receiver before the data is outdated or before a time-to-live period defined for the data ends.

[0265] Pursuant to aforementioned embodiments of the present disclosure, when one or more given data packets including a plurality of mutually different types of data are communicated from at least one transmitter to at least one receiver, the one or more given data packets form at least one data stream. Optionally, the at least one data stream is generated as follows in following computational phases:

- (a) initial data is first added into the at least one data stream, wherein the initial data includes, for example, one or more of: control commands, audio data, video data and so forth; and
- (b) the at least one data stream is assembled into one or more data packets to be communicated from the at least one transmitter to the at least one receiver.

Optionally, there are a plurality of data streams that are utilized in such communication. Optionally, a plurality of data streams are employed for generating the one or more data packets.

[0266] Compression of the data can take place in either of the computational phases, even if beneficially it is executed already when the data is added to the streams, thereby avoiding a delay when a given data packet is filled for encoding the entire given data packet. Optionally, sometimes the data becomes outdated during the filling of the data packets, and there is provided a computational arrangement for removing such outdated data from the at least one data stream. Optionally, such removal is performed before data compression occurs for the one or more data packets.

[0267] Optionally, in an example embodiment of the present disclosure, data packets are generated pursuant to a three-stage process, wherein the process includes:

- (i) providing data to at least one data stream;
- (ii) compressing the at least one data stream; and
- (iii) assembling the at least one data stream to generate one or more data packets to be communicated from at least one given transmitter to at least one given receiver.

Other processes to generate the data packets, for example as described in the foregoing are optionally employed for embodiments of the present disclosure.

[0268] Modifications to embodiments of the invention described in the foregoing are possible without departing from the scope of the invention as defined by the accompanying claims. Expressions such as "including", "comprising", "incorporating", "consisting of", "have", "is" used to describe and claim the present invention are intended to be construed in a non-exclusive manner, namely allowing for items, components or elements not explicitly described also to be present. Reference to the singular is also to be construed to relate to the plural. Numerals included within parentheses in the accompanying claims are intended to assist understanding of the claims and should not be construed in any way to limit subject matter claimed by these claims.

REFERENCES

Reference Index	Detail
[1]	Real Time Messaging Protocol - Wikipedia, the free encyclopedia (accessed February 11, 2015), URL: http://en.wikipedia.org/wiki/Real Time Messaging Protocol
[2]	Adobe's Real Time Messaging Protocol (accessed February 11, 2015), URL: http://www.adobe.com/content/dam/Adobe/en/devnet/rtp/pdf/rtmp_specification_1.0.pdf
[3]	Quality of service - Wikipedia, the free encyclopedia (accessed February 11, 2015), URL: http://en.wikipedia.org/wiki/Quality_of_service
[4]	Nagle's algorithm - Wikipedia, the free encyclopedia (accessed February 11, 2015), URL: http://en.wikipedia.org/wiki/Nagle%27s_algorithm
[5]	General Packet Radio Service - Wikipedia, the free encyclopedia (accessed February 11, 2015), URL: http://en.wikipedia.org/wiki/General_Packet_Radio_Service
[6]	Wireless LAN - Wikipedia, the free encyclopedia (accessed February 11, 2015), URL: http://en.wikipedia.org/wiki/Wireless_LAN
[7]	Maximum transmission unit - Wikipedia, the free encyclopedia (accessed February 11, 2015), URL: http://en.wikipedia.org/wiki/Maximum_transmission_unit

(continued)

Reference Index	Detail
[8]	Path MTU Discovery - Wikipedia, the free encyclopedia (accessed February 11, 2015), URL: http://en.wikipedia.org/wiki/Path_MTU_Discovery
[9]	Two-way Real-time Communication System Utilizing HTTP (accessed February 11, 2015), URL: http://gurulogic.com/files/WO2014173521A1.pdf
[10]	Data Communication System and Method (accessed February 11, 2015), URL: http://gurulogic.com/files/US2014317173A1.pdf

Claims

1. A transmitter (202) for use in a data communication system (200), the transmitter (202) being operable to communicate data packets (504, 506) via a data communication network (204) and/or a data carrier to at least one receiver (206), wherein the transmitter (202) is operable to construct the data packets (504, 506) and include within at least one of the data packets (504, 506) a plurality of mutually different types of data, **characterized in that** the plurality of mutually different types of data have different priorities, wherein when the at least one of the data packets (504, 506) is constructed, the type of data having a highest priority is added first and is followed by the type of data having a lower priority going towards a lowest priority.
2. A transmitter (202) of claim 1, **characterized in that** the transmitter (202) is operable to communicate to the at least one receiver (206) information that is indicative of different priorities of the plurality of mutually different types of data.
3. A receiver (206) for use in a data communication system (200), wherein the receiver (206) is operable to process at least one data packet (504, 506) received via a data communication network (204) and/or a data carrier from at least one transmitter (202), wherein the at least one data packet (504, 506) includes a plurality of mutually different types of data, and the receiver (206) is operable to process the mutually different types of data to mutually separate the mutually different types of data, **characterized in that** the plurality of mutually different types of data have different priorities, wherein the receiver (206) is operable to unpack the at least one data packet (504, 506) to extract the plurality of mutually different types of data from the at least one data packet (504, 506), and to construct data streams of the mutually different types of data as per a descending order of priorities in which the plurality of mutually different types of data occur in the at least one data packet (504, 506).
4. A receiver (206) of claim 3, **characterized in that** the receiver (206) is operable to receive information that is indicative of different priorities of the plurality of mutually different types of data, and to process the mutually different types of data according to the information that is indicative of the different priorities of the plurality of mutually different types of data.
5. A method of communicating data, the method comprising communicating data packets (504, 506) via a data communication network (204) and/or a data carrier from at least one transmitter (202) to at least one receiver (206), wherein the method further comprises constructing the data packets (504, 506) and including within at least one of the data packets (504, 506) a plurality of mutually different types of data, **characterized in that** the plurality of mutually different types of data have different priorities, wherein when the at least one of the data packets (504, 506) is constructed, the type of data having a highest priority is added first and is followed by the type of data having a lower priority going towards a lowest priority.
6. A method of claim 5, **characterized in that** the method further comprises communicating to the at least one receiver (206) information that is indicative of the different priorities of the plurality of mutually different types of data.
7. A method of claim 6, **characterized in that** the method further comprises including the information to be indicative of at least one of: life-times of the different types of data, permissible latencies of the different types of data, formats of the different types of data, time-to-live expectations of the different types of data, required response times for the different types of data.

8. A method of any one of claims 5 to 7, **characterized in that** the method further comprises constructing the data packets (504, 506) as determined by configuration data received from the at least one receiver (206) and/or the data communication network (204).
- 5 9. A method of any one of claims 5 to 8, **characterized in that** the method further comprises assembling the data packets (504, 506) until their size approaches substantially a maximum segment size of the data communication network (204) before sending the data packets (504, 506) to the at least one receiver (206).
- 10 10. A method of claim 9, **characterized in that** the method further comprises adjusting a size of the data packets (504, 506) to a maximum supported segment size of an entire communication route through the data communication network (204) from the at least one transmitter (202) to the at least one receiver (206).
- 15 11. A method of claim 10, **characterized in that** the method further comprises periodically reprobng the maximum supported segment size of the entire communication route; and adjusting dynamically the size of the data packets (504, 506) pursuant to the reprobng maximum supported segment size of the entire communication route.
- 20 12. A method of any one of claims 5 to 11, **characterized in that** the method further comprises employing a maximum delay before sending a given data packet (504, 506); and padding the given data packet (504, 506) to a maximum segment size if insufficient data has been provided for the mutually different types of data when the maximum delay is reached.
- 25 13. A data communication system (200) comprising at least one transmitter (202) that is operable to execute a method of any one of claims to 12.
- 30 14. A method of operating a transmitter (202), the method comprising communicating data packets (504, 506) via a data communication network (204) and/or a data carrier to at least one receiver (206), wherein the method further comprises including within at least one of the data packets (504, 506) a plurality of mutually different types of data, **characterized in that** the plurality of mutually different types of data have different priorities, wherein when the at least one of the data packets (504, 506) is constructed, the type of data having a highest priority is added first and is followed by the type of data having a lower priority going towards a lowest priority.
- 35 15. A method of operating a receiver (206), wherein the method comprises:
 processing at least one data packet (504, 506) received via a data communication network (204) and/or a data carrier from at least one transmitter (202), wherein the at least one data packet (504, 506) includes a plurality of mutually different types of data; and
 processing the mutually different types of data to mutually separate the plurality of mutually different types of data, **characterized in that** the plurality of mutually different types of data have different priorities, wherein the method further comprises unpacking the at least one data packet (504, 506) to extract the plurality of mutually different types of data from the at least one data packet (504, 506); and constructing data streams of the mutually different types of data as per a descending order of priorities in which the plurality of mutually different types of data occur in the at least one data packet (504, 506).

45 **Patentansprüche**

1. Sender (202) zur Verwendung in einem Datenkommunikationssystem (200), wobei der Sender (202) betriebsfähig ist, um Datenpakete (504, 506) über ein Datenkommunikationsnetz (204) und/oder einen Datenträger an mindestens einen Empfänger (206) zu übermitteln, wobei der Sender (202) betriebsfähig ist, um die Datenpakete (504, 506) aufzubauen und innerhalb zumindest eines der Datenpakete (504, 506) eine Vielzahl von voneinander unterschiedlichen Datentypen einzuschließen,
 50 **dadurch gekennzeichnet, dass** die Vielzahl von voneinander unterschiedlichen Datentypen mehrere Prioritäten aufweisen, wobei beim Aufbauen des mindestens einen der Datenpakete (504, 506) zuerst der Datentyp mit der höchsten Priorität, gefolgt von dem Datentyp mit niedrigerer Priorität bis hinunter zu einer niedrigsten Priorität hinzugefügt wird.
- 55 2. Sender (202) nach Anspruch 1, **dadurch gekennzeichnet, dass** der Sender (202) betriebsfähig ist, um an den mindestens einen Empfänger (206) Informationen zu übermitteln, die mehrere Prioritäten der Vielzahl von vonein-

ander unterschiedlichen Datentypen angeben.

3. Empfänger (206) zur Verwendung in einem Datenkommunikationssystem (200), wobei der Empfänger (206) betriebsfähig ist, um mindestens ein Datenpaket (504, 506) zu verarbeiten, das über ein Datenkommunikationsnetz (204) und/oder einen Datenträger von mindestens einem Sender (202) empfangen wurde, wobei das mindestens eine Datenpaket (504, 506) eine Vielzahl von voneinander unterschiedlichen Datentypen umfasst und der Empfänger (206) betriebsfähig ist, um die voneinander unterschiedlichen Datentypen zu verarbeiten, um die voneinander unterschiedlichen Datentypen voneinander zu trennen,
dadurch gekennzeichnet, dass die Vielzahl von voneinander unterschiedlichen Datentypen mehrere Prioritäten aufweisen, wobei der Empfänger (206) zum Entpacken des mindestens einen Datenpakets (504, 506) betriebsfähig ist, um die Vielzahl von voneinander unterschiedlichen Datentypen aus dem mindestens einen Datenpaket (504, 506) zu extrahieren und Datenströme der voneinander unterschiedlichen Datentypen in einer absteigenden Reihenfolge von Prioritäten aufzubauen, in der die Vielzahl von voneinander unterschiedlichen Datentypen in dem mindestens ein Datenpaket (504, 506) vorkommen.
4. Empfänger (206) nach Anspruch 3, **dadurch gekennzeichnet, dass** der Empfänger (206) betriebsfähig ist, um Informationen zu empfangen, die mehrere Prioritäten der Vielzahl von voneinander unterschiedlichen Datentypen angeben, und um die voneinander unterschiedlichen Datentypen gemäß den Informationen zu verarbeiten, die die eine oder die mehreren Prioritäten der Vielzahl von voneinander unterschiedlichen Datentypen angeben.
5. Verfahren zum Übermitteln von Daten, wobei das Verfahren das Übermitteln von Datenpaketen (504, 506) über ein Datenkommunikationsnetz (204) und/oder einen Datenträger von mindestens einem Sender (202) an mindestens einen Empfänger (206) umfasst, wobei das Verfahren ferner das Aufbauen der Datenpakete (504, 506) und Einschließen einer Vielzahl von voneinander unterschiedlichen Datentypen in mindestens eines der Datenpakete (504, 506) umfasst,
dadurch gekennzeichnet, dass die Vielzahl von voneinander unterschiedlichen Datentypen mehrere Prioritäten aufweisen, wobei beim Aufbauen des mindestens einen der Datenpakete (504, 506) zuerst der Datentyp mit der höchsten Priorität, gefolgt von dem Datentyp mit niedrigerer Priorität bis hinunter zu einer niedrigsten Priorität hinzugefügt wird.
6. Verfahren nach Anspruch 5, **dadurch gekennzeichnet, dass** das Verfahren ferner das Übermitteln von Informationen an den mindestens einen Empfänger (206) umfasst, die die unterschiedlichen Prioritäten der Vielzahl von voneinander unterschiedlichen Datentypen angeben.
7. Verfahren nach Anspruch 6, **dadurch gekennzeichnet, dass** das Verfahren ferner das Einschließen der Informationen umfasst, die mindestens eines angeben aus: Lebensdauer der unterschiedlichen Datentypen, zulässigen Latenzen der unterschiedlichen Datentypen, Formaten der unterschiedlichen Datentypen, Erwartungen an die Lebenszeit der unterschiedlichen Datentypen, erforderlichen Reaktionszeiten für die unterschiedlichen Datentypen.
8. Verfahren nach einem der Ansprüche 5 bis 7, **dadurch gekennzeichnet, dass** das Verfahren ferner das Aufbauen der Datenpakete (504, 506) umfasst, wie durch Konfigurationsdaten bestimmt, die von dem mindestens einen Empfänger (206) und/oder dem Kommunikationsnetzwerk (204) empfangen wurden.
9. Verfahren nach einem der Ansprüche 5 bis 8, **dadurch gekennzeichnet, dass** das Verfahren ferner das Zusammenstellen der Datenpakete (504, 506) umfasst, bis sich ihre Größe im Wesentlichen einer maximalen Segmentgröße des Datenkommunikationsnetzes (204) annähert, bevor die Datenpakete (504, 506) an den mindestens einen Empfänger (206) gesendet werden.
10. Verfahren nach Anspruch 9, **dadurch gekennzeichnet, dass** das Verfahren ferner das Einstellen einer Größe der Datenpakete (504, 506) auf eine maximale unterstützte Segmentgröße eines gesamten Kommunikationswegs durch das Datenkommunikationsnetz (204) von dem mindestens einen Sender (202) zu dem mindestens einen Empfänger (206) umfasst.
11. Verfahren nach Anspruch 10, **dadurch gekennzeichnet, dass** das Verfahren ferner ein periodisch wiederholtes Prüfen der maximalen unterstützten Segmentgröße des gesamten Kommunikationswegs; und dynamisches Einstellen der Größe der Datenpakete (504, 506) entsprechend der wiederholten Prüfung der maximalen unterstützten Segmentgröße des gesamten Kommunikationswegs umfasst.

12. Verfahren nach einem der Ansprüche 5 bis 11, **dadurch gekennzeichnet, dass** das Verfahren ferner das Verwenden einer maximalen Verzögerung vor dem Senden eines gegebenen Datenpakets (504, 506); und Auffüllen des gegebenen Datenpakets (504, 506) auf eine maximale Segmentgröße umfasst, wenn nicht genügend Daten für die voneinander unterschiedlichen Datentypen bereitgestellt wurden, wenn die maximale Verzögerung erreicht ist.

13. Datenkommunikationssystem (200), das mindestens einen Sender (202) umfasst, der betriebsfähig ist, um ein Verfahren nach einem der Ansprüche bis 12 auszuführen.

14. Verfahren zum Betreiben eines Senders (202), wobei das Verfahren das Übermitteln von Datenpaketen (504, 506) über ein Datenkommunikationsnetz (204) und/oder einen Datenträger an mindestens einen Empfänger (206) umfasst, wobei das Verfahren ferner das Einschließen einer Vielzahl von voneinander unterschiedlichen Datentypen innerhalb mindestens eines der Datenpakete (504, 506) umfasst, **dadurch gekennzeichnet, dass** die Vielzahl von voneinander unterschiedlichen Datentypen mehrere Prioritäten aufweisen, wobei beim Aufbauen des mindestens einen der Datenpakete (504, 506) zuerst der Datentyp mit der höchsten Priorität, gefolgt von dem Datentyp mit niedrigerer Priorität bis hinunter zu einer niedrigsten Priorität hinzugefügt wird.

15. Verfahren zum Betreiben eines Empfängers (206), wobei das Verfahren umfasst:

Verarbeiten von mindestens einem über ein Datenkommunikationsnetz (504) und/oder einen Datenträger von mindestens einem Sender (202) empfangenen Datenpakets (506, 204), wobei das mindestens eine Datenpaket (504, 506) eine Vielzahl von voneinander unterschiedlichen Datentypen umfasst; und
 Verarbeiten der voneinander unterschiedlichen Datentypen, um die Vielzahl von voneinander unterschiedlichen Datentypen voneinander zu trennen,
dadurch gekennzeichnet, dass die Vielzahl von voneinander unterschiedlichen Datentypen mehrere Prioritäten aufweisen, wobei das Verfahren ferner das Entpacken des mindestens einen Datenpakets (504, 506) umfasst, um aus dem mindestens einen Datenpaket (506, 504) die Vielzahl von voneinander unterschiedlichen Datentypen zu extrahieren; und Aufbauen von Datenströmen der voneinander unterschiedlichen Datentypen in einer absteigenden Reihenfolge von Prioritäten, in der die Vielzahl von voneinander unterschiedlichen Datentypen in dem mindestens einen Datenpaket (504, 506) vorkommen.

Revendications

1. Émetteur (202) destiné à être utilisé pour un système de communication de données (200), l'émetteur (202) pouvant fonctionner pour communiquer des paquets de données (504, 506) par le biais d'un réseau de communication de données (204) et/ou d'un support de données vers au moins un récepteur (206), dans lequel l'émetteur (202) peut fonctionner pour construire les paquets de données (504, 506) et inclure dans au moins l'un des paquets de données (504, 506) une pluralité de types de données mutuellement différents,
caractérisé en ce que la pluralité de types de données mutuellement différents ont plusieurs priorités, dans lequel lorsque l'au moins un des paquets de données (504, 506) est construit, le type de données ayant une priorité la plus élevée est ajouté en premier et est suivi du type de données ayant une priorité inférieure allant vers une priorité la plus basse.

2. Émetteur (202) selon la revendication 1, **caractérisé en ce que** l'émetteur (202) peut fonctionner pour communiquer à l'au moins un récepteur (206) des informations qui sont indicatives de plusieurs priorités de la pluralité de types de données mutuellement différents.

3. Récepteur (206) destiné à être utilisé pour un système de communication de données (200), dans lequel le récepteur (206) peut fonctionner pour traiter au moins un paquet de données (504, 506) reçu par le biais d'un réseau de communication de données (204) et/ou d'un support de données à partir d'au moins un émetteur (202), dans lequel l'au moins un paquet de données (504, 506) inclut une pluralité de types de données mutuellement différents, et le récepteur (206) peut fonctionner pour traiter les types de données mutuellement différents pour séparer mutuellement les types de données mutuellement différents,
caractérisé en ce que la pluralité de types de données mutuellement différents ont plusieurs priorités, dans lequel le récepteur (206) peut fonctionner pour décompresser l'au moins un paquet de données (504, 506) pour extraire la pluralité de types de données mutuellement différents à partir de l'au moins un paquet de données (504, 506), et pour construire des flux de données des types de données mutuellement différents en fonction d'un ordre de priorités décroissant dans lequel la pluralité de types de données mutuellement différents surviennent dans l'au

moins un paquet de données (504, 506).

4. Récepteur (206) selon la revendication 3, **caractérisé en ce que** le récepteur (206) peut fonctionner pour recevoir des informations qui sont indicatives de plusieurs priorités de la pluralité de types de données mutuellement différents, et pour traiter les types de données mutuellement différents selon les informations qui sont indicatives de la ou des priorités de la pluralité de types de données mutuellement différents.
5. Procédé de communication de données, le procédé comprenant la communication de paquets de données (504, 506) par le biais d'un réseau de communication de données (204) et/ou d'un support de données à partir d'au moins un émetteur (202) vers au moins un récepteur (206), dans lequel le procédé comprend en outre la construction des paquets de données (504, 506) et l'inclusion dans au moins l'un des paquets de données (504, 506) d'une pluralité de types de données mutuellement différents, **caractérisé en ce que** la pluralité de types de données mutuellement différents ont plusieurs priorités, dans lequel lorsque l'au moins un des paquets de données (504, 506) est construit, le type de données ayant une priorité la plus élevée est ajouté en premier et est suivi du type de données ayant une priorité inférieure allant vers une priorité la plus basse.
6. Procédé selon la revendication 5, **caractérisé en ce que** le procédé comprend en outre la communication vers l'au moins un récepteur (206) d'informations qui sont indicatives des plusieurs priorités de la pluralité de types de données mutuellement différents.
7. Procédé selon la revendication 6 **caractérisé en ce que** le procédé comprend en outre l'inclusion des informations devant être indicatives d'au moins l'un des éléments suivants : durées de vie des différents types de données, temps d'attente admissibles des différents types de données, formats des différents types de données, attentes de durée de vie des différents types de données, temps de réponse requis pour les différents types de données.
8. Procédé selon l'une quelconque des revendications 5 à 7, **caractérisé en ce que** le procédé comprend en outre la construction des paquets de données (504, 506) tels que déterminés par des données de configuration reçues de l'au moins un récepteur (206) et/ou du réseau de communication de données (204).
9. Procédé selon l'une quelconque des revendications 5 à 8, **caractérisé en ce que** le procédé comprend en outre l'assemblage des paquets de données (504, 506) jusqu'à ce que leur taille s'approche sensiblement d'une taille de segment maximum du réseau de communication de données (204) avant d'envoyer les paquets de données (504, 506) vers l'au moins un récepteur (206).
10. Procédé selon la revendication 9, **caractérisé en ce que** le procédé comprend en outre le réglage d'une taille des paquets de données (504, 506) à une taille de segment supportée maximum d'une route de communication entière à travers le réseau de communication de données (204) à partir de l'au moins un émetteur (202) vers l'au moins un récepteur (206).
11. Procédé selon la revendication 10, **caractérisé en ce que** le procédé comprend en outre la vérification périodique de la taille de segment supportée maximum de la route de communication entière ; et le réglage dynamique de la taille des paquets de données (504, 506) conformément à la taille de segment supportée maximum vérifiée de la route de communication entière.
12. Procédé selon l'une quelconque des revendications 5 à 11, **caractérisé en ce que** le procédé comprend en outre l'utilisation d'un retard maximum avant l'envoi d'un paquet de données donné (504, 506) ; et le remplissage du paquet de données donné (504, 506) à une taille de segment maximum si des données insuffisantes ont été fournies pour les types de données mutuellement différents lorsque le retard maximal est atteint.
13. Système de communication de données (200) comprenant au moins un émetteur (202) qui peut fonctionner pour exécuter un procédé selon l'une quelconque des revendications 1 à 12.
14. Procédé de fonctionnement d'un émetteur (202), le procédé comprenant la communication de paquets de données (504, 506) par le biais d'un réseau de communication de données (204) et/ou d'un support de données vers au moins un récepteur (206), dans lequel le procédé comprend en outre l'inclusion dans au moins l'un des paquets de données (504, 506) d'une pluralité de types de données mutuellement différents, **caractérisé en ce que** la pluralité de types de données mutuellement différents ont plusieurs priorités, dans lequel lorsque l'au moins un des paquets

de données (504, 506) est construit, le type de données ayant une priorité la plus élevée est ajouté en premier et est suivi du type de données ayant une priorité inférieure allant vers une priorité la plus basse.

15. Procédé de fonctionnement d'un récepteur (206), dans lequel le procédé comprend :

5

le traitement d'au moins un paquet de données (504, 506) reçu par le biais d'un réseau de communication de données (204) et/ou d'un support de données à partir d'au moins un émetteur (202), dans lequel l'au moins un paquet de données (504, 506) inclut une pluralité de types de données mutuellement différents ; et le traitement des types de données mutuellement différents pour séparer mutuellement la pluralité de types de données mutuellement différents,

10

caractérisé en ce que la pluralité de types de données mutuellement différents ont plusieurs priorités, dans lequel le procédé comprend en outre la décompression de l'au moins un paquet de données (504, 506) pour extraire la pluralité de types de données mutuellement différents à partir de l'au moins un paquet de données (504, 506) ; et la construction de flux de données des types de données mutuellement différents en fonction d'un ordre de priorités décroissant dans lequel la pluralité de types de données mutuellement différents surviennent dans l'au moins un paquet de données (504, 506).

15

20

25

30

35

40

45

50

55

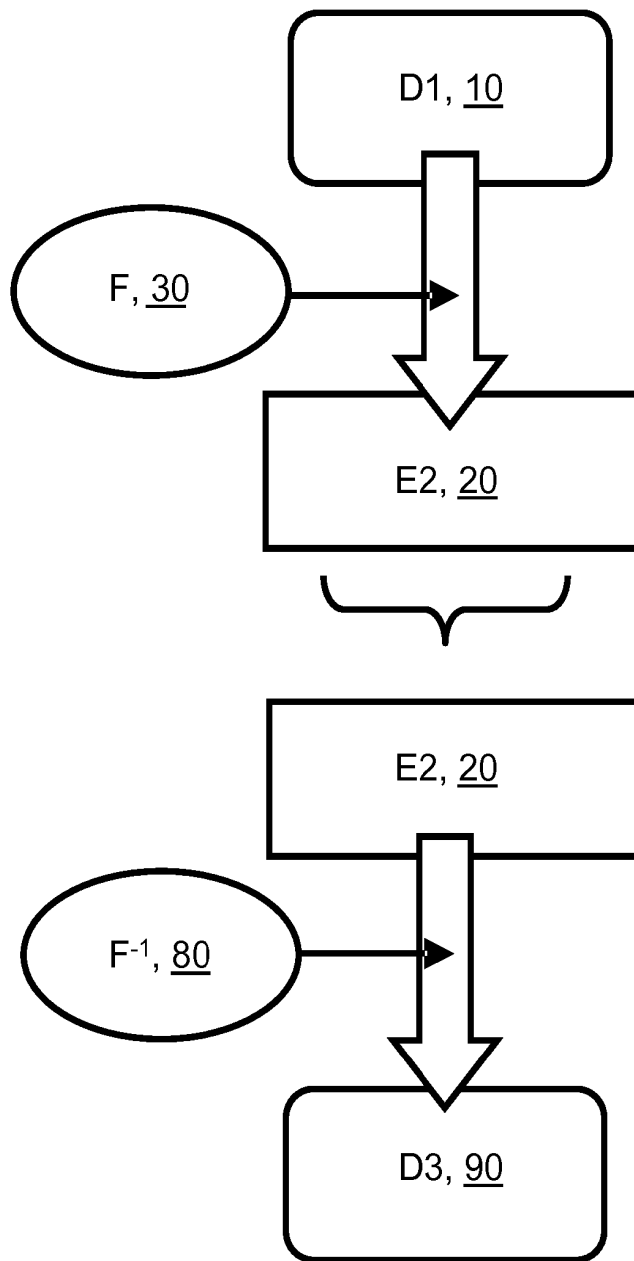


FIG. 1 (Prior Art)

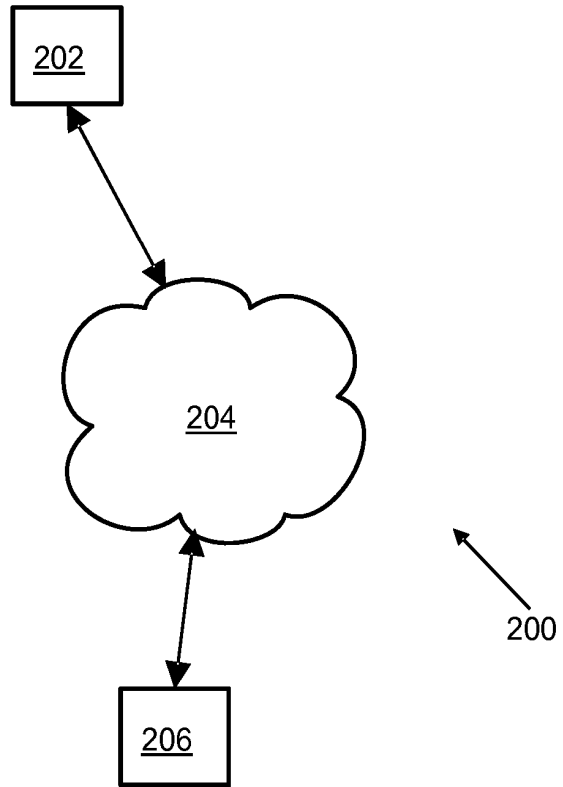


FIG. 2

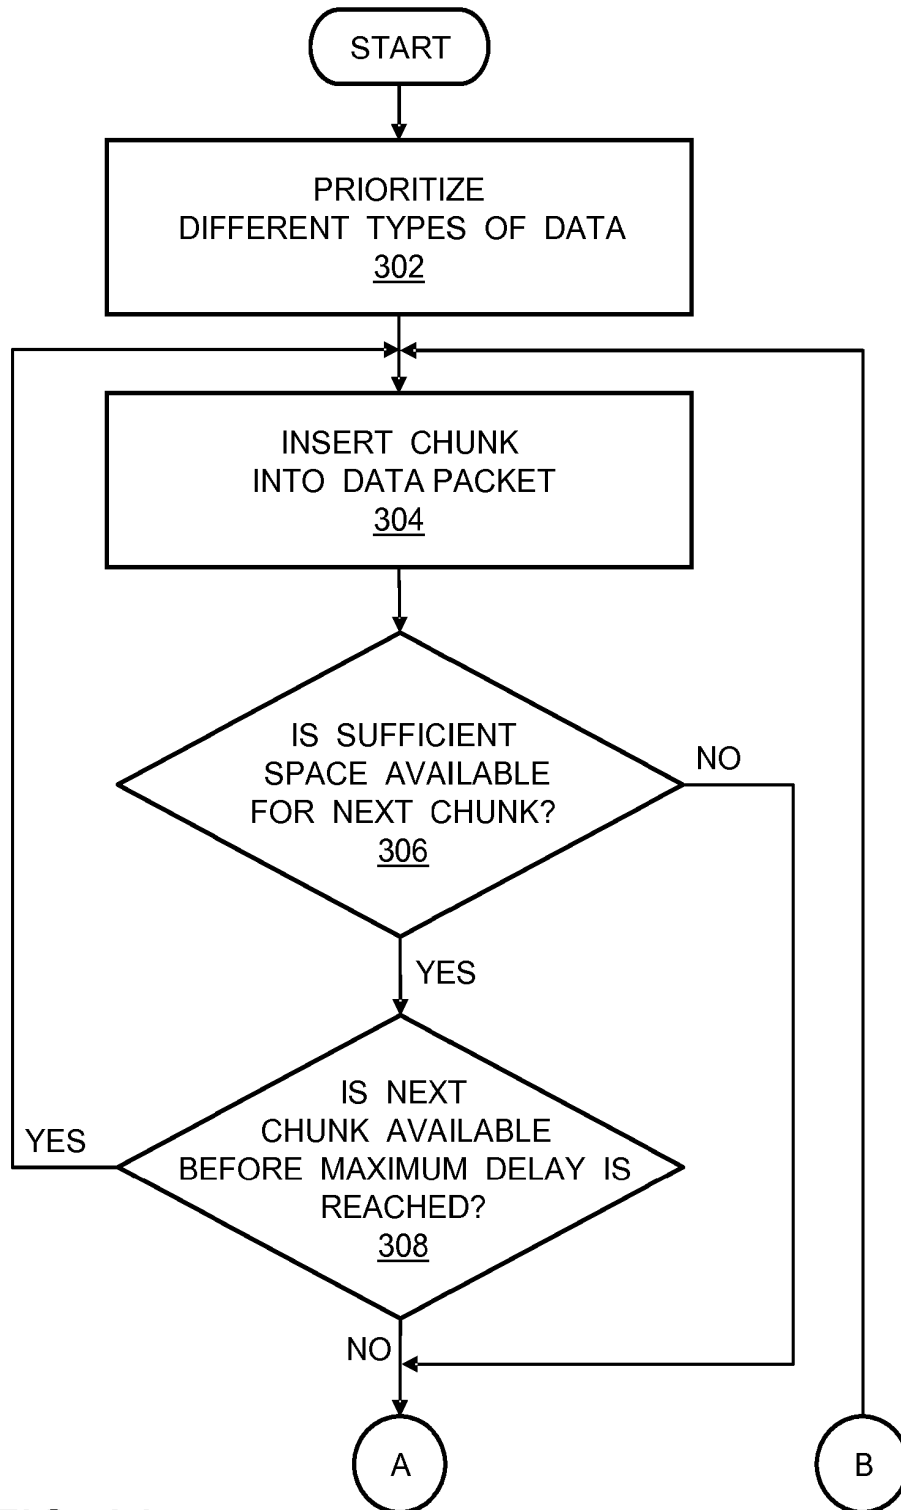


FIG. 3A

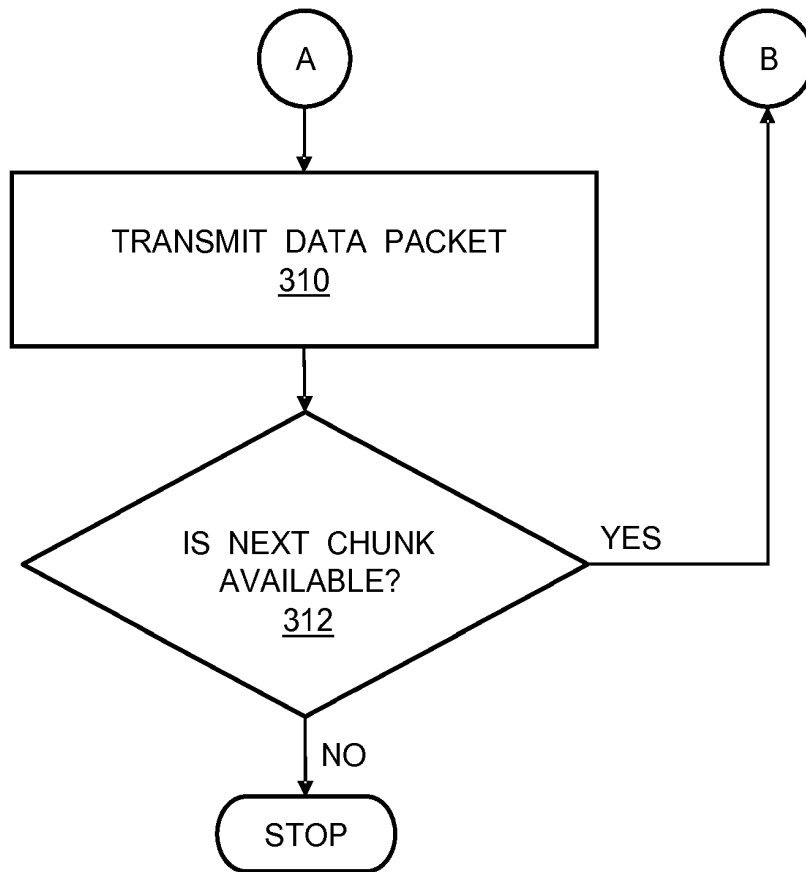


FIG. 3B

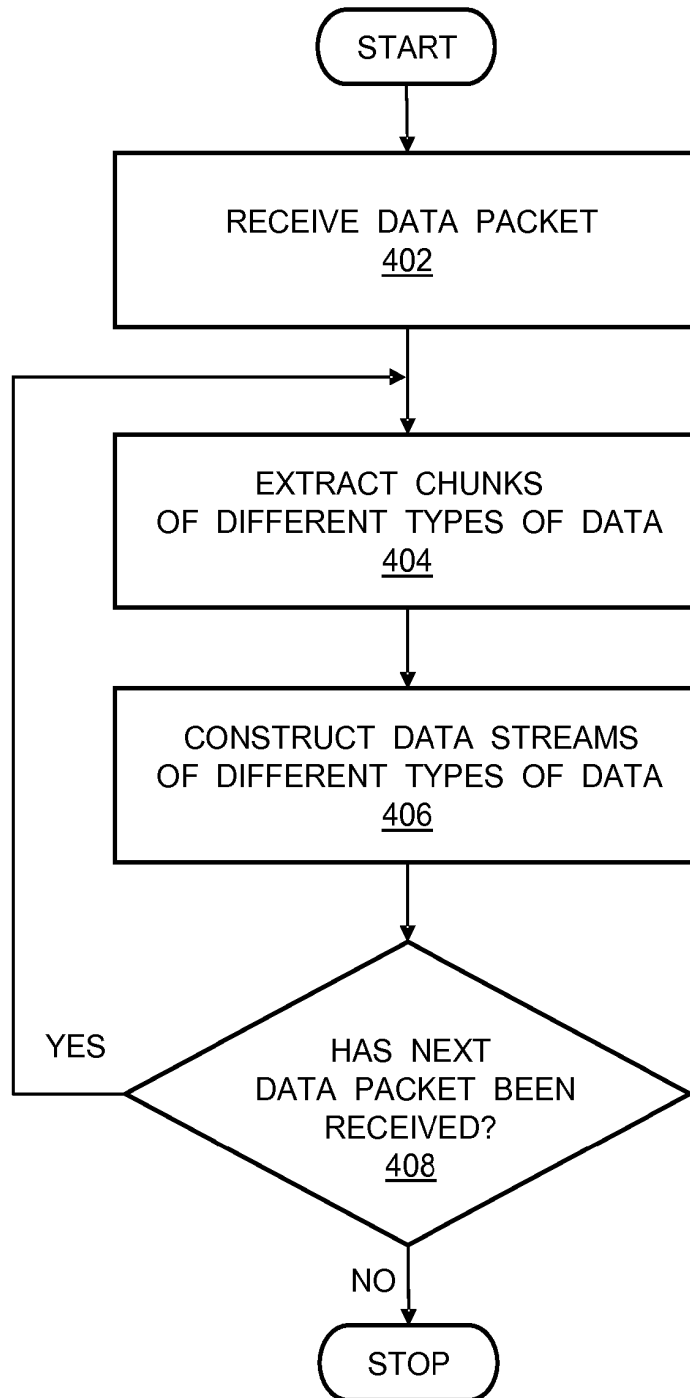


FIG. 4

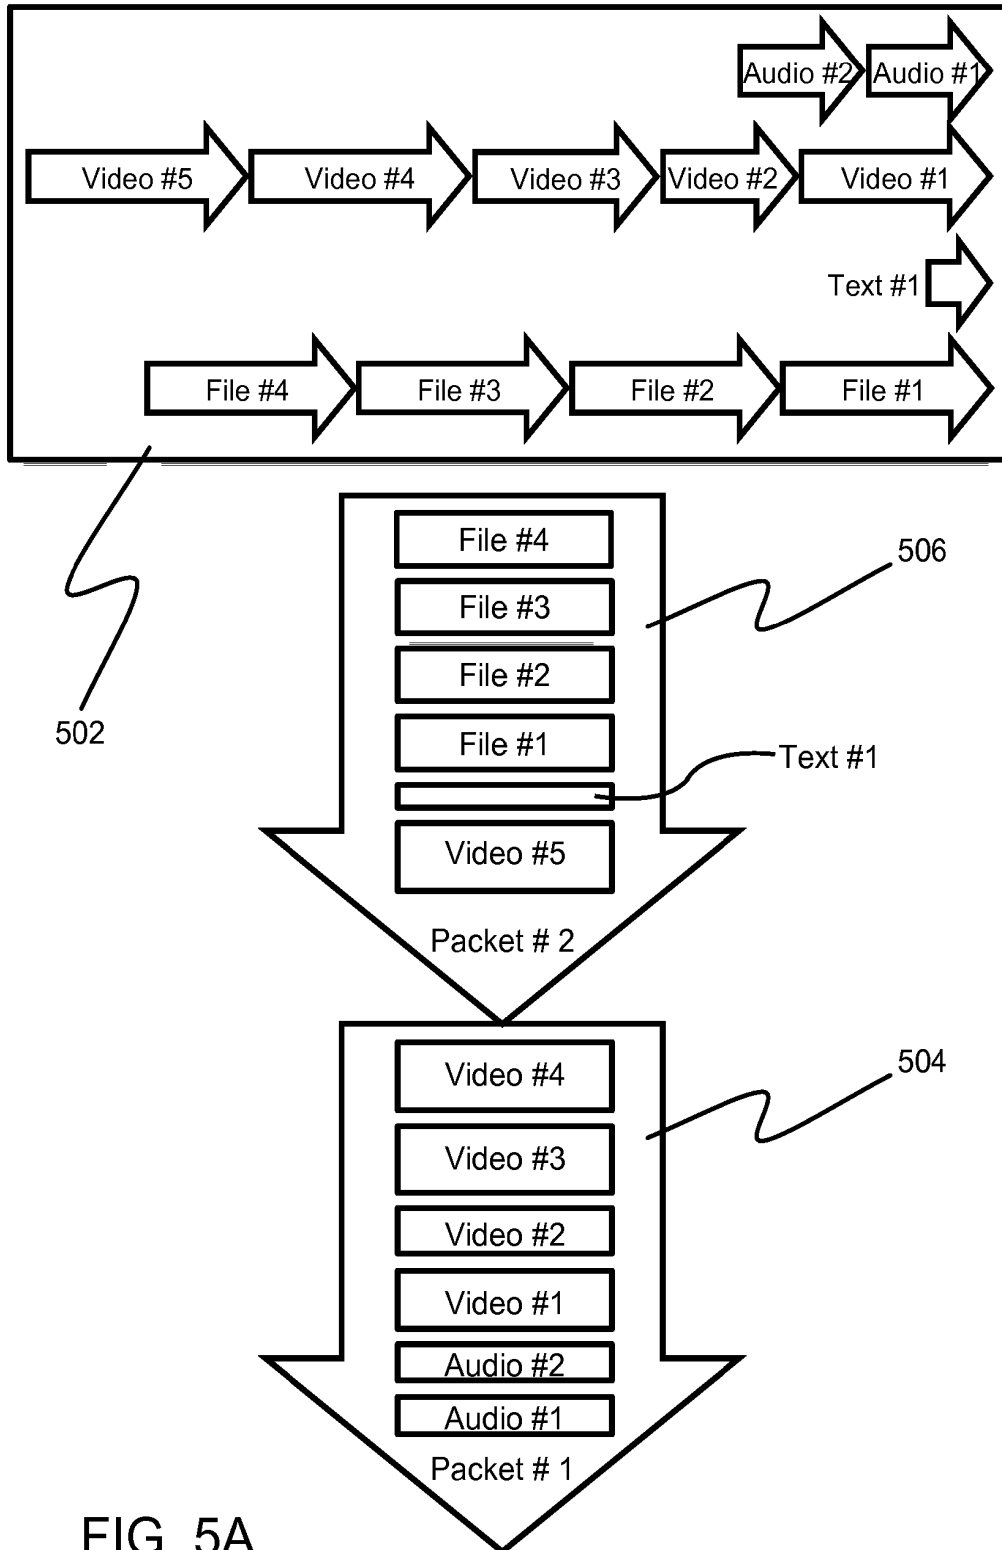


FIG. 5A

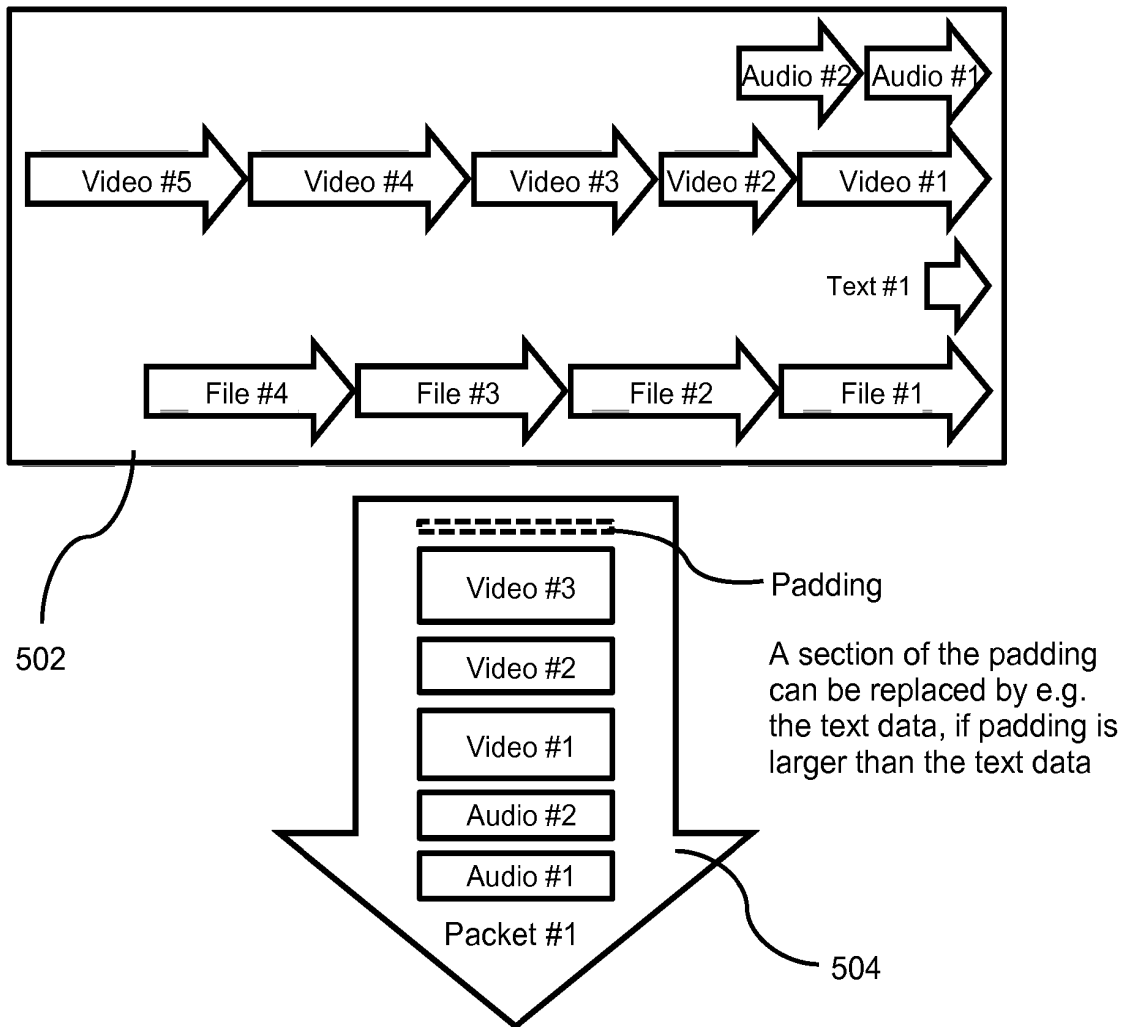


FIG. 5B

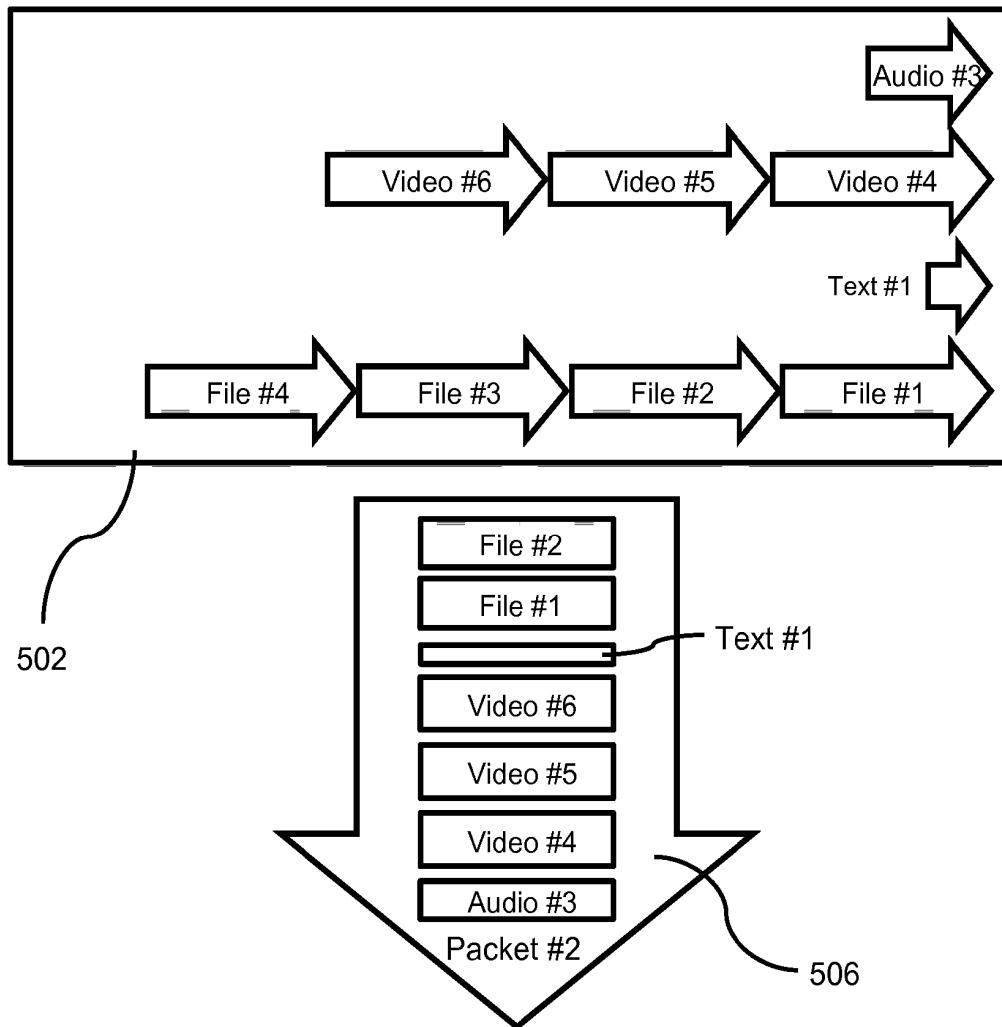


FIG. 5C

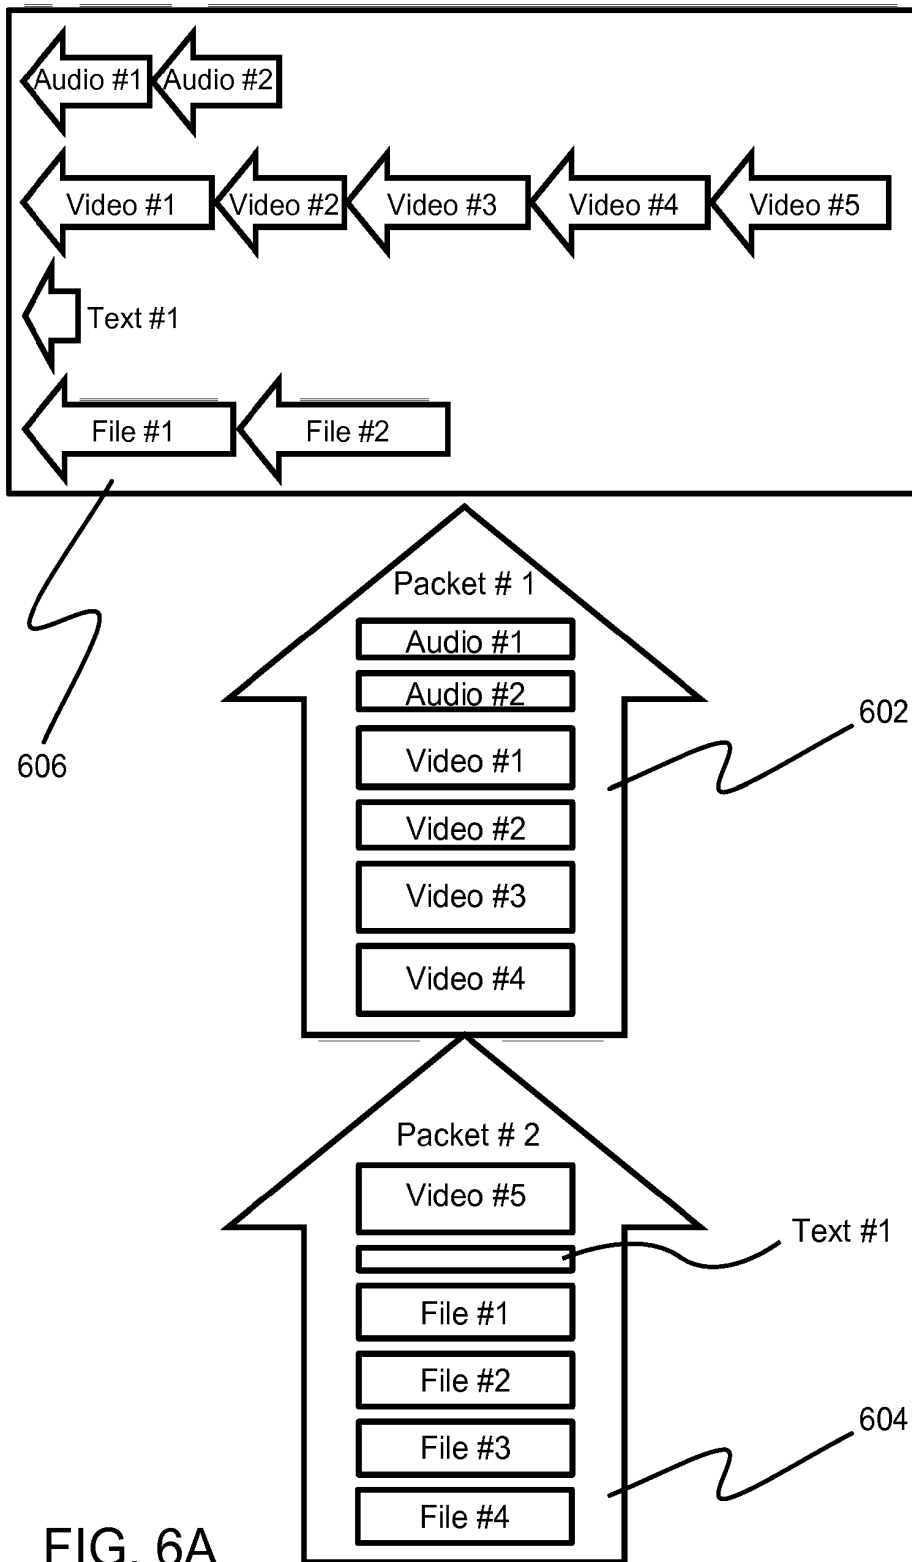


FIG. 6A

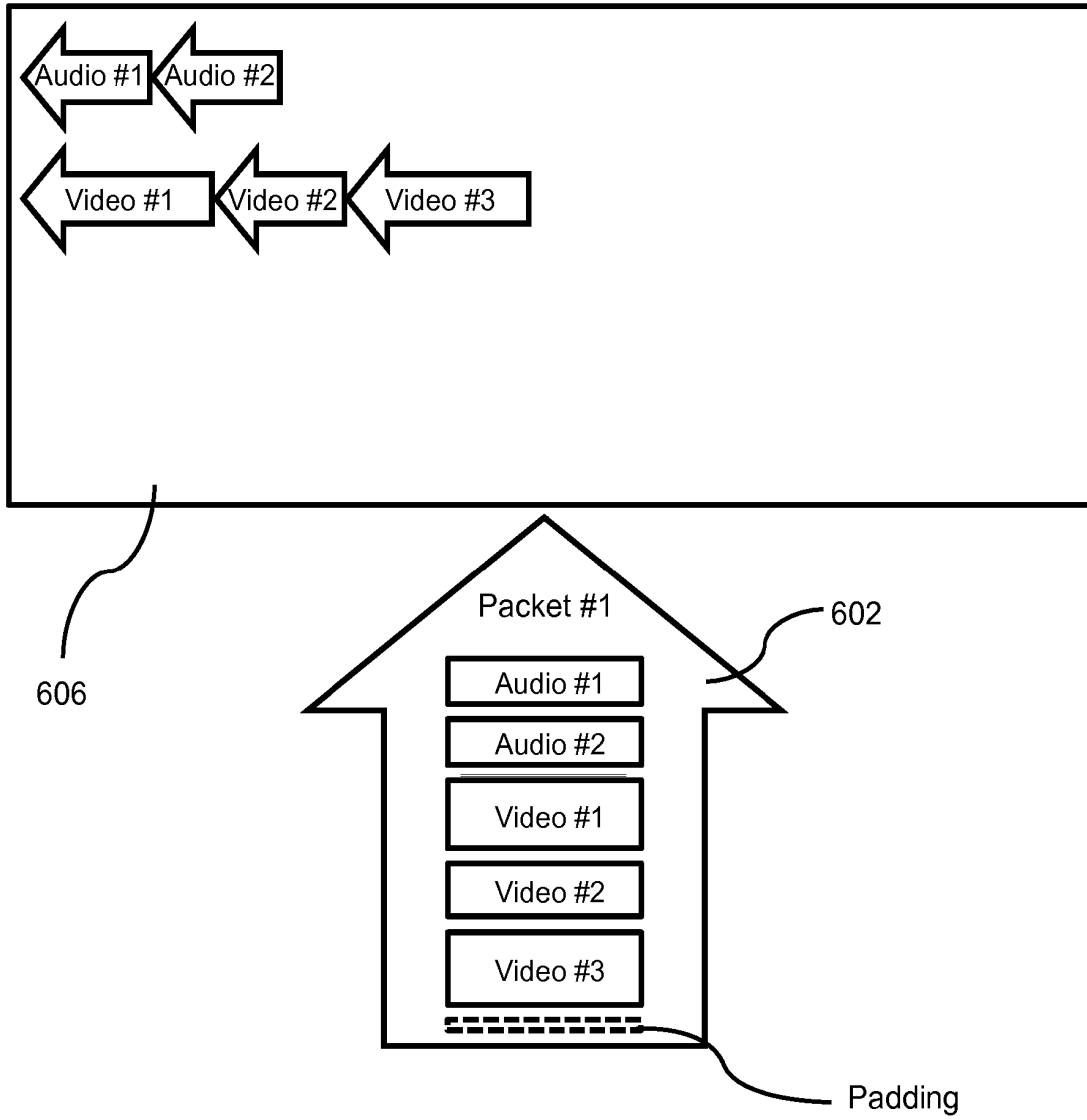


FIG. 6B

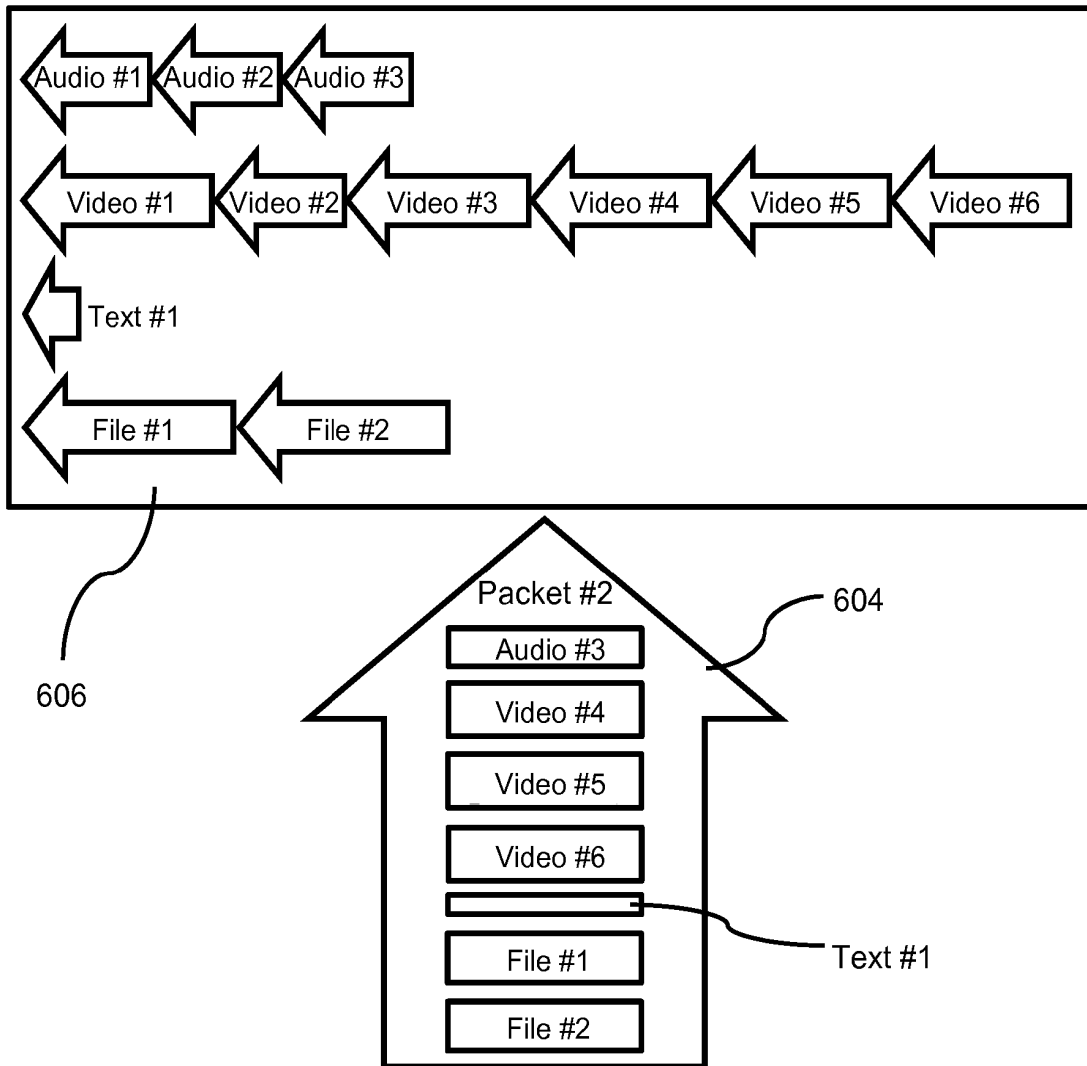


FIG. 6C

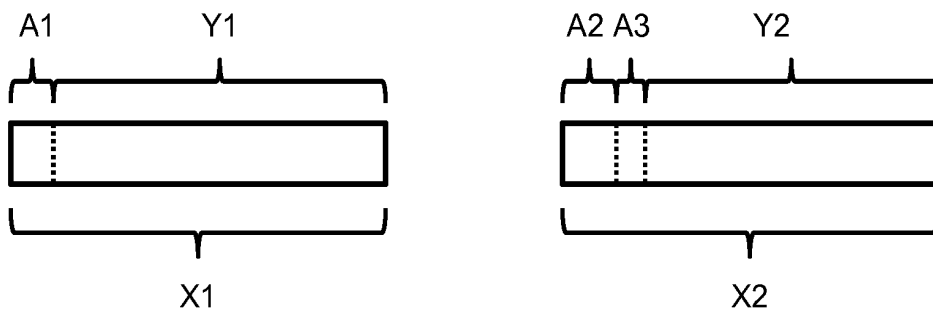


FIG. 7A

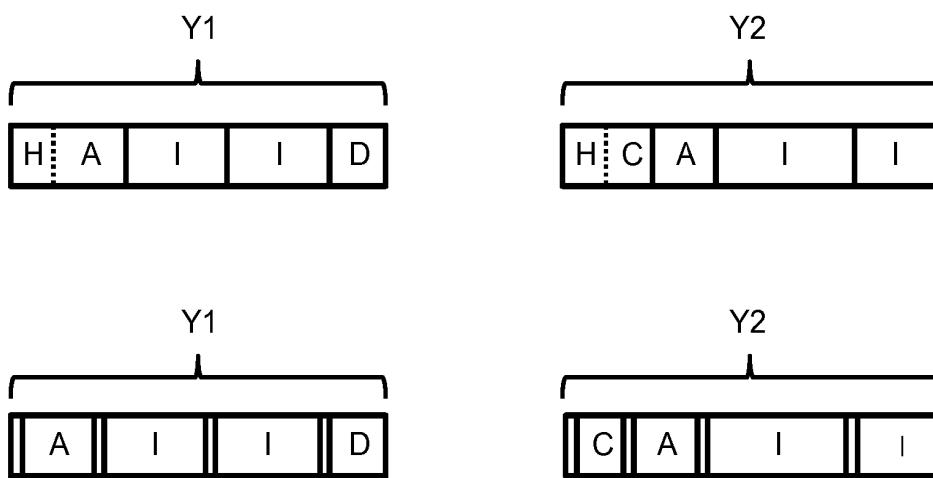


FIG. 7B

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 20070104224 A1 [0019]
- US 20080192726 A1 [0020]
- US 20100040084 A1 [0021]
- US 20120063449 A1 [0022]
- US 20030035413 A1 [0023]
- US 7000120 B1 [0024]
- WO 2014173521 A1 [0268]
- US 2014317173 A1 [0268]

Non-patent literature cited in the description

- Real Time Messaging Protocol - Wikipedia, the free encyclopedia. 11 February 2015 [0268]
- *Adobe's Real Time Messaging Protocol*, 11 February 2015, http://www.adobe.com/content/dam/Adobe/en/devnet/rtp/pdf/rtp_specification_1.0.pdf [0268]
- Quality of service - Wikipedia, the free encyclopedia. 11 February 2015 [0268]
- Nagle's algorithm - Wikipedia, the free encyclopedia. 11 February 2015 [0268]
- General Packet Radio Service - Wikipedia, the free encyclopedia. 11 February 2015 [0268]
- Wireless LAN - Wikipedia, the free encyclopedia. 11 February 2015 [0268]
- Maximum transmission unit - Wikipedia, the free encyclopedia. 11 February 2015 [0268]
- Path MTU Discovery - Wikipedia, the free encyclopedia. 11 February 2015 [0268]
- *Two-way Real-time Communication System Utilizing HTTP*, 11 February 2015, <http://gurulogic.com/files> [0268]